


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

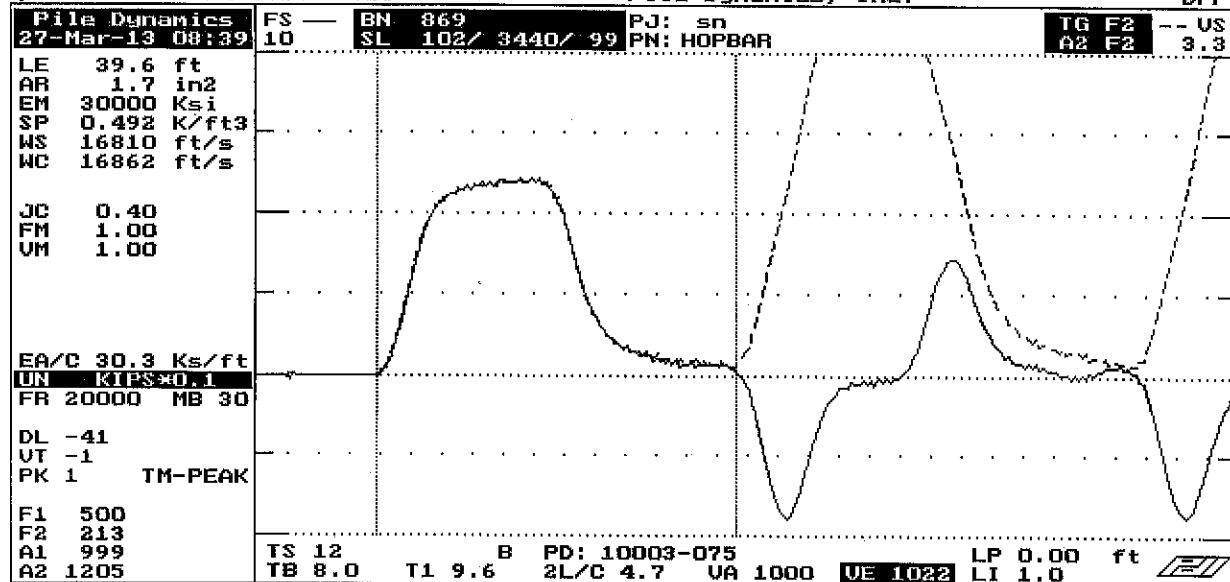

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

<-AT:PIEZORESISTIVE

VMX= 4.0 FMX= 61 AMX= 129
EMX= 0.2 MEX= 119 FUP= 1.00

ACCELEROMETER CALIBRATION

N.I.S.T. Traceable

SERIAL NUMBER: 10003

CALIBRATION FACTOR: 1205 G/v

PAK (*50007):

DATE: 27-MAR-13

PDA OPERATOR:

OP: alex [ver:4.05]

AT:PIEZOELECTRIC->