


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

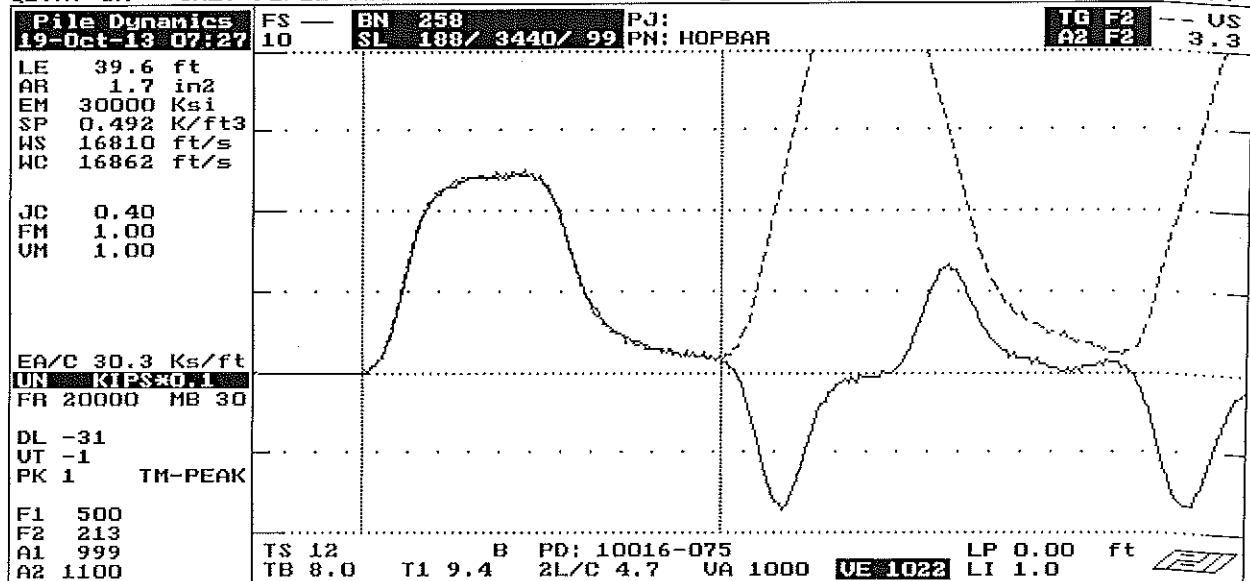

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 4.0 FMX= 63 AMX= 129 EMX= 0.3 MEX= 123 FVP= 0.99
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 10016 UW PE CALIBRATION FACTOR: 1100 G/G DATE: 19-07-13 PDA OPERATOR: <i>[Signature]</i>

<-AT:PIEZORESISTIVE OP: dale [ver:4.05] AT:PIEZOELECTRIC->