QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

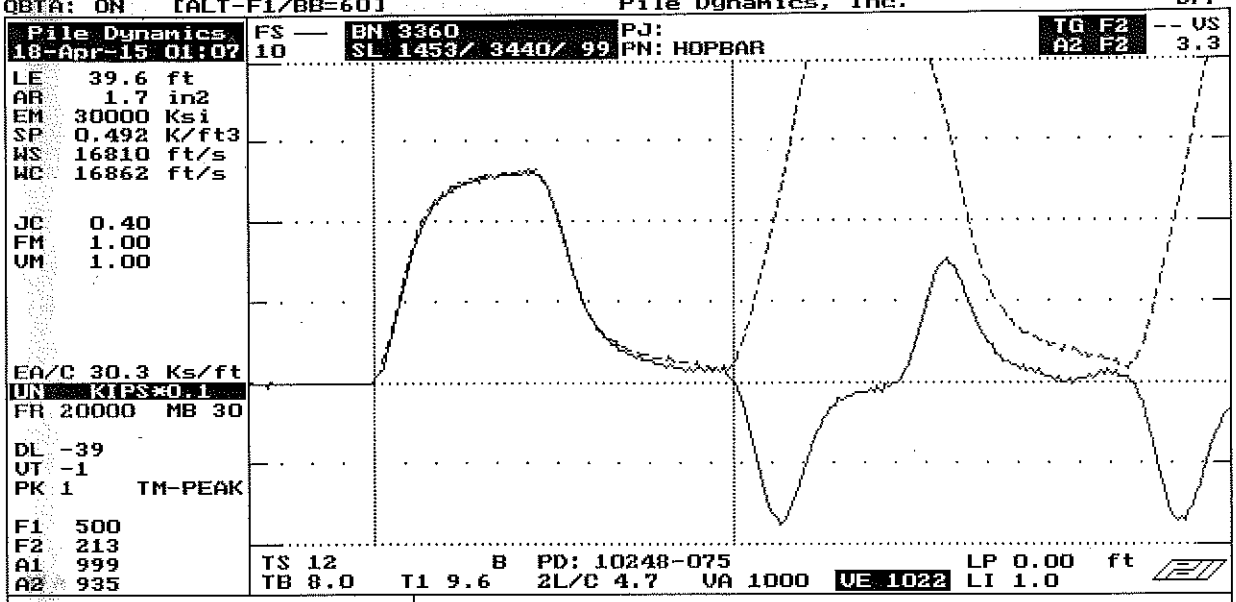

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.3 FMX= 66 AMX= 139
EMX= 0.3 MEX= 129 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10248

CALIBRATION FACTOR: 935 mV/g

~~PAK (*5000)~~: _____ DATE: 21APR15

PDA OPERATOR: M. Wrig

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] A1:PIEZOELECTRIC->