
QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

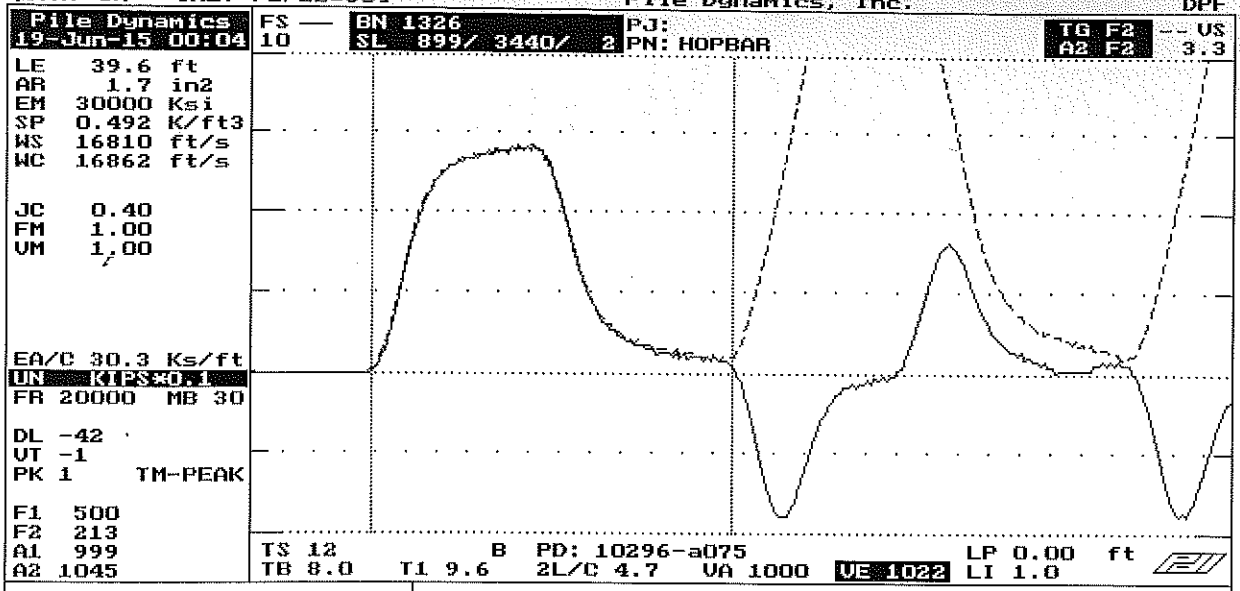

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.6 FMX= 71 AMX= 139
EMX= 0.3 MEX= 139 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10296

CALIBRATION FACTOR: 1045 e/v

~~PAK-(*5000)~~: _____ DATE: 19 JUNE 15

PDA OPERATOR: D. M. Wr

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->