
QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

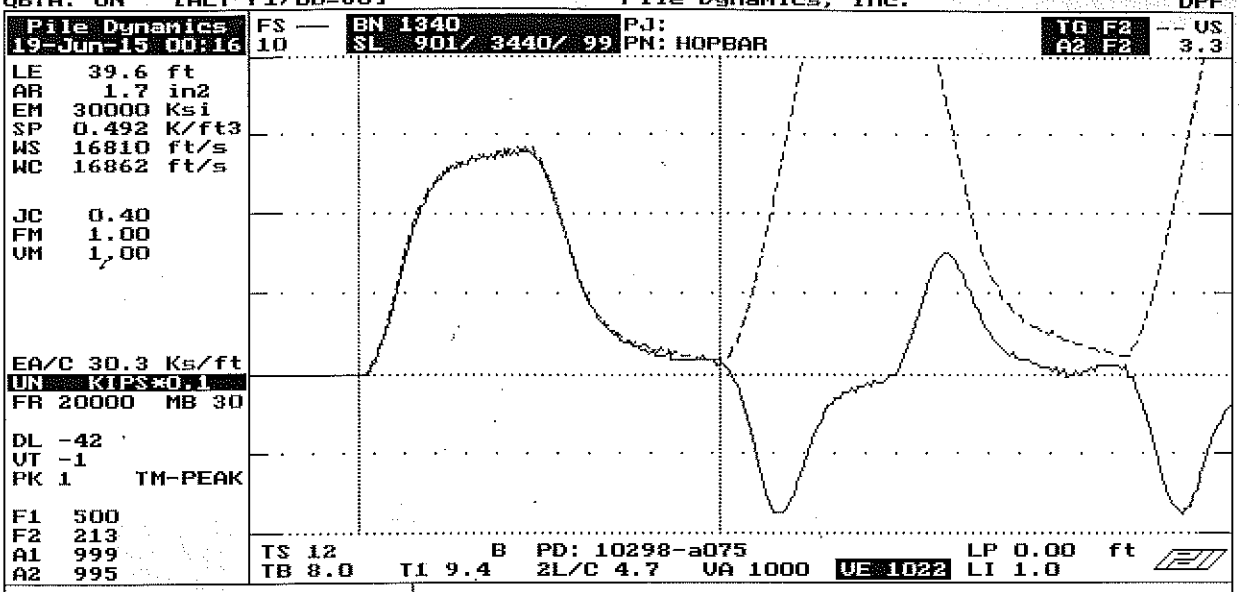

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.6 FMX= 70 AMX= 129
EMX= 0.3 MEX= 137 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10298

CALIBRATION FACTOR: 995 g/v

~~PAK (*5000)~~: DATE: 19JUNE15

PDA OPERATOR: Don M. Wray

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->