QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

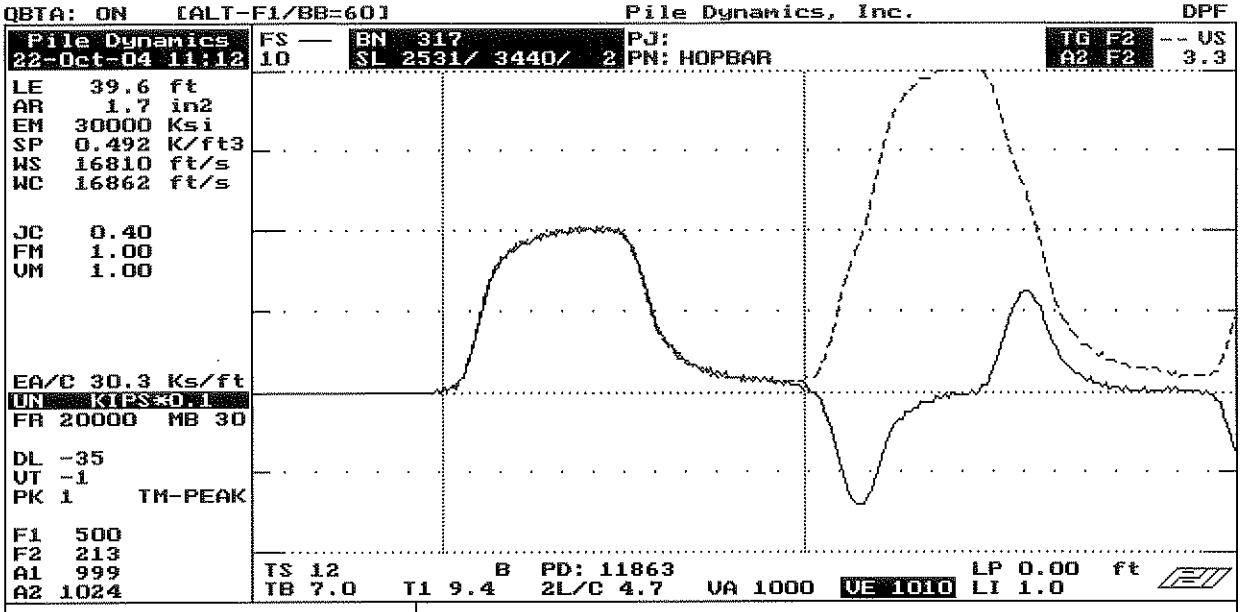

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 3.3 FMX= 51 AMX= 120
EMX= 0.2 MEX= 100 FVP= 0.98

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 11863

CALIBRATION FACTOR: 1024 G/V

~~PAK (*5000)~~: _____ DATE: 22oct04

PDA OPERATOR: JC

<-AT:PIEZORESISTIVE OP: DAVE Ever:4.05A AT:PIEZOELECTRIC->