QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

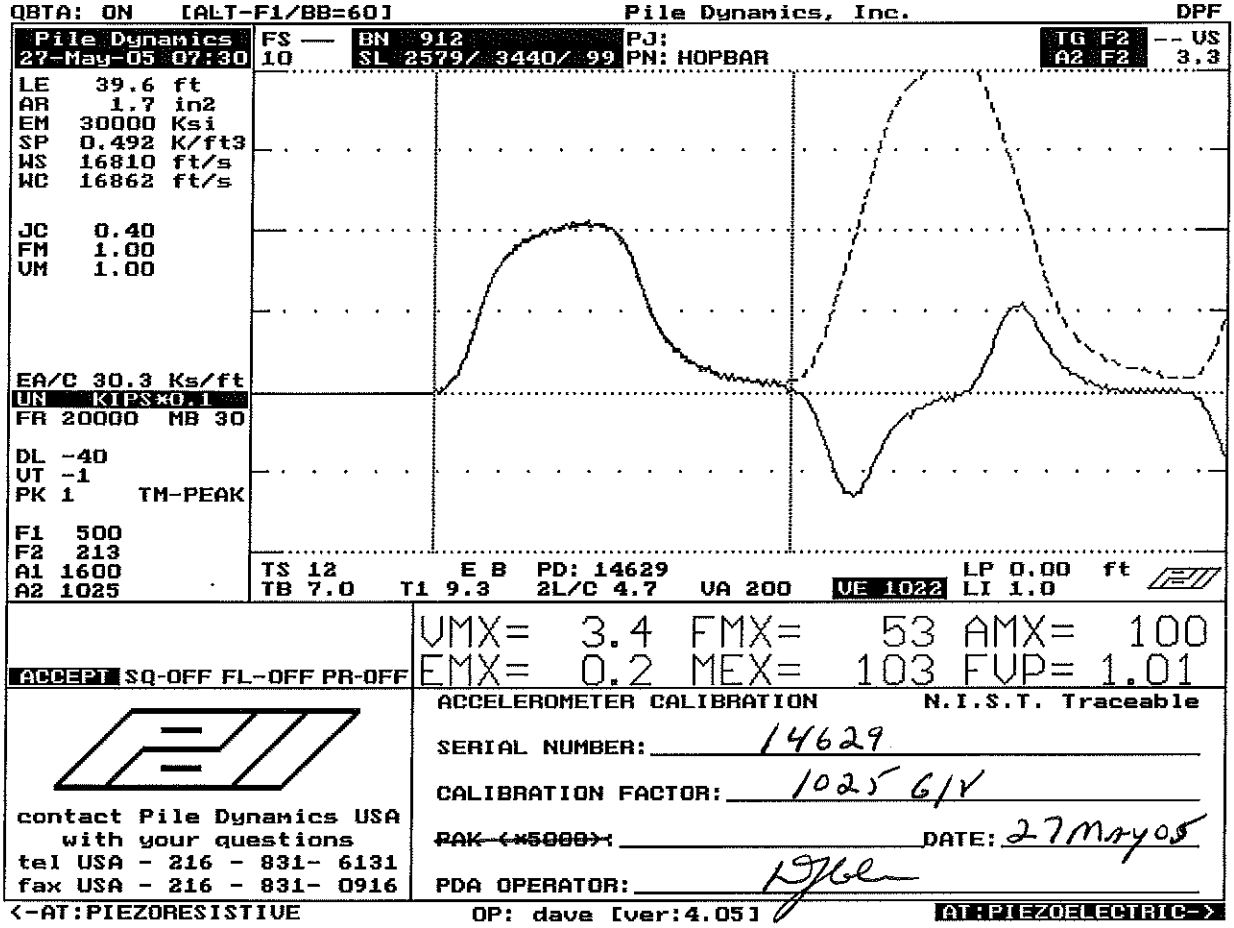


ACCEPT SQ-OFF FL-OFF PR-OFF

| | | | | | |
|---|---|---|---|---|---|
| VMX= | 3.4 | FMX= | 53 | AMX= | 100 |
| EMX= | 0.2 | MEX= | 103 | FVP= | 1.01 |

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 14629

CALIBRATION FACTOR: 1025 G/V

~~PAK (*5000)~~: _____ DATE: 27 May 05

PDA OPERATOR: DJG

<-AT:PIEZORESISTIVE OP: dave [ver:4.05] AT:PIEZOELECTRIC->