



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics 22-Oct-09 08:08 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS 0.1 FR 20000 MB 30 DL -39 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1010	FS — BN 341 10 SL 2874/ 3440/ 99 PJ: sn PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 B PD: 18634-060 LP 0.00 ft TB 8.0 T1 9.6 2L/C 4.7 UA 1000 UE 1022 LI 1.0
---	---

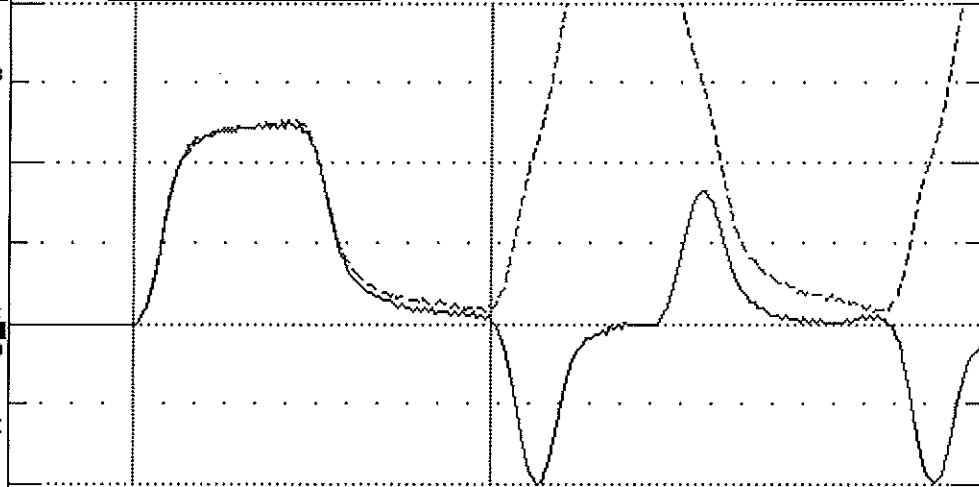

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	UMX= 4.0 FMX= 63 AMX= 149 EMX= 0.2 MEX= 123 FVP= 0.98 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: <u>18634</u> CALIBRATION FACTOR: <u>1010 G/v</u> PAK (*5000): _____ DATE: <u>22-Oct-09</u> PDA OPERATOR: <u>Dale Bunnell</u>
---	---

<-AT:PIEZORESISTIVE OP: dale Iver:4.051 **AT:PIEZOELECTRIC**>