


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

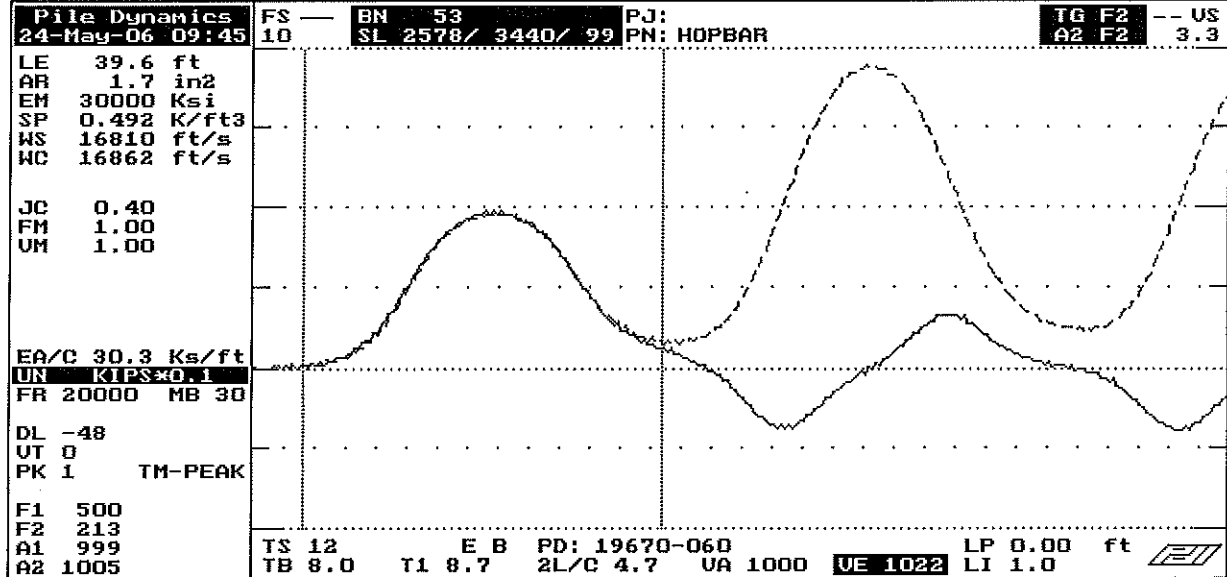

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 3.1	FMX= 49	AMX= 80
	EMX= 0.1	MEX= 96	FVP= 0.98



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION

N.I.S.T. Traceable

SERIAL NUMBER: 19670

CALIBRATION FACTOR: 1005 G/V

RAK (5000): DATE: 24-May-06

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: DAVE [ver:4.05]

[AT:PIEZOELECTRIC->