


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

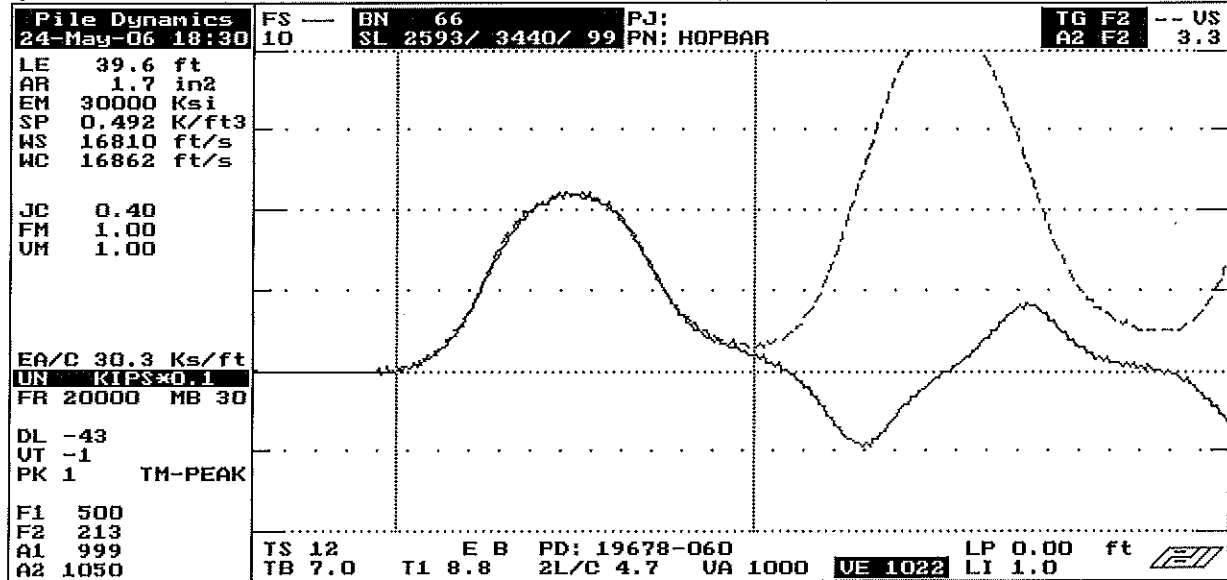

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 3.6 FMX= 56 AMX= 80 EMX= 0.2 MEX= 109 FVP= 0.99
 contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 19678 CALIBRATION FACTOR: 1050 G/V RAK (*5000): DATE: 24-May-06 PDA OPERATOR: <i>[Signature]</i>
<-AT:PIEZORESISTIVE	OP: fred [ver:4.05] AT:PIEZOELECTRIC->