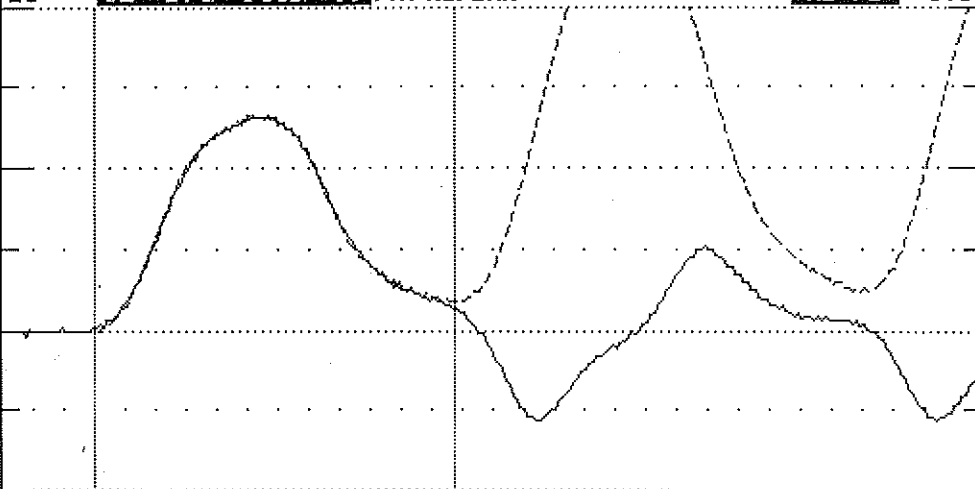


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
21-Oct-14 07:44FS —
10BN 347
SL 174/ 3440/ 99PJ:
PN: HOPBARTG F2 -- US
A2 F2 3.3LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/sJC 0.40
FM 1.00
UM 1.00EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 30DL -42
UT -1
PK 1 TM-PEAKF1 500
F2 213
A1 999
A2 1035TS 12 B PD: 20052-060 LP 0.00 ft
TB 8.0 T1 9.2 2L/C 4.7 VA 1000 UE 1022 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916VMX= 4.3 FMX= 66 AMX= 120
EMX= 0.4 MEX= 129 FVP= 0.98

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 20052

CALIBRATION FACTOR: 1035%

PAK (*5000): DATE: 21 OCT 14

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: Iaine [ver:4.05]

[AT:PIEZOELECTRIC->