


OBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

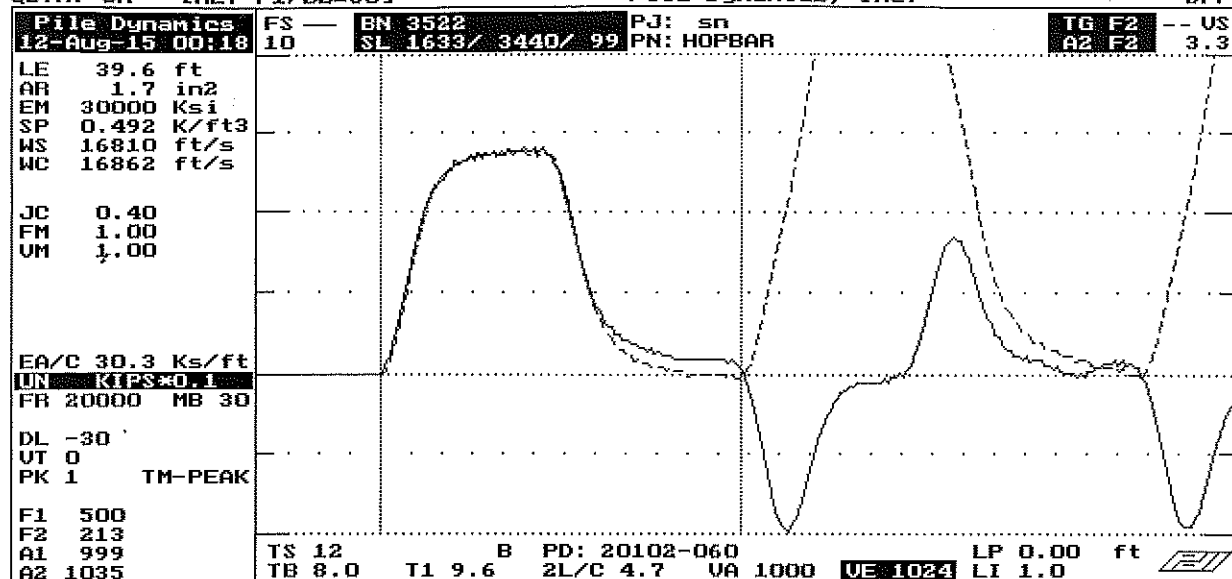

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

VMX= 4.6 FMX= 70 AMX= 159
EMX= 0.4 MEX= 137 FUP= 0.97

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 20102

CALIBRATION FACTOR: 1035%

PAK-(*5000): DATE: 14 AUG 15

PDA OPERATOR: M. Wray

<-AT:PIEZORESISTIVE

OP: Iaine Iver:4.051

AT:PIEZOELECTRIC->