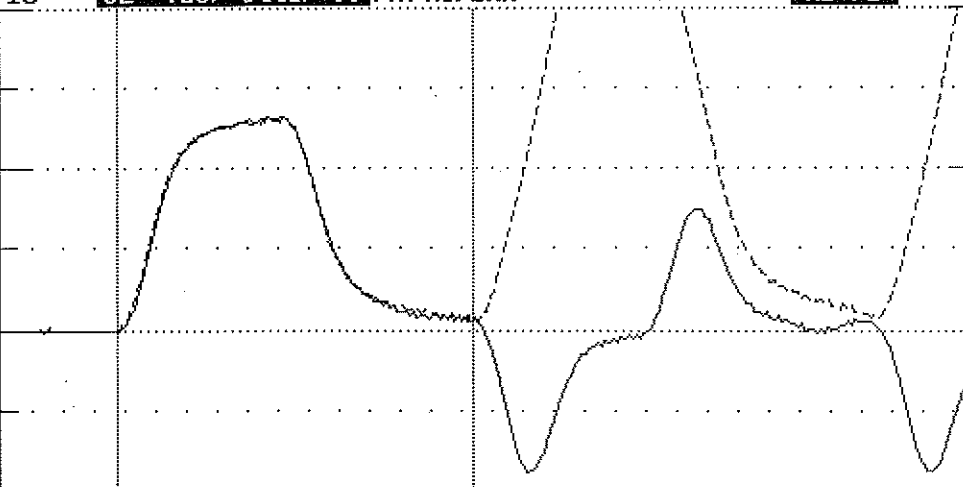



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics 08-Mar-15 03:56		FS — 10	BN 1114 SL 726/ 3440/ 99	PJ: PN: HOPBAR	TG F2 -- US A2 F2 3.3
LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 17043 ft/s JC 0.40 FM 1.00 UM 1.00					
EA/C 30.3 Ks/ft UN KIPS*0.1 FR 20000 MB 30					
DL -43 UT -1 PK 1 TM-PEAK					
F1 500 F2 213 A1 999 A2 985					
TS 12 TB 8.0		B PD: 20126-9 060 T1 9.5 2L/C 4.7		LP 0.00 ft LI 1.0	
ACCEPT SQ-OFF FL-OFF PR-OFF		UMX= 4.3 FMX= 66 AMX= 129 EMX= 0.3 MEX= 129 FVP= 1.01			
 contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916		ACCELEROMETER CALIBRATION N.I.S.T. Traceable			
		SERIAL NUMBER: 20126			
		CALIBRATION FACTOR: 985 %			
		PAK (*5000): DATE: 15MAR15			
PDA OPERATOR: <i>[Signature]</i>		OP: laine [ver:4.05]			
<-AT:PIEZORESISTIVE		AT:PIEZOELECTRIC->			