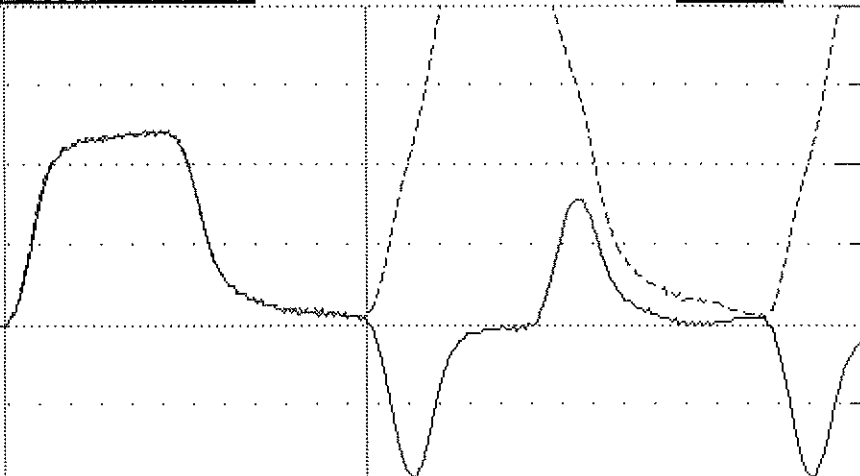


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics 14-Apr-11 10:26		FS — 10	BN 417 SL 2868/ 3440/ 99	PJ: sn PN: HOPBAR	TG F2 -- US A2 F2 3.3
LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s					
JC 0.40 FM 1.00 VM 1.00					
EA/C 30.3 Ks/ft UN KIPSx0.1 FR 20000 MB 30					
DL -39 UT -1 PK 1 TM-PEAK					
F1 500 F2 213 A1 999 A2 1035					
TS 12 TB 8.0		B PD: 20338-060 T1 9.6 2L/C 4.7 VA 200		LP 0.00 ft LI 1.0	

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 4.0 FMX= 61 AMX= 149 EMX= 0.2 MEX= 119 FUP= 1.00
-----------------------------	--



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 20338

CALIBRATION FACTOR: 1035 G/V

PAK (*5000): DATE: 14-APR-11

PDA OPERATOR: *alex*

<-AT:PIEZORESISTIVE

OP: alex [ver:4.05]

[AT:PIEZOELECTRIC->