QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

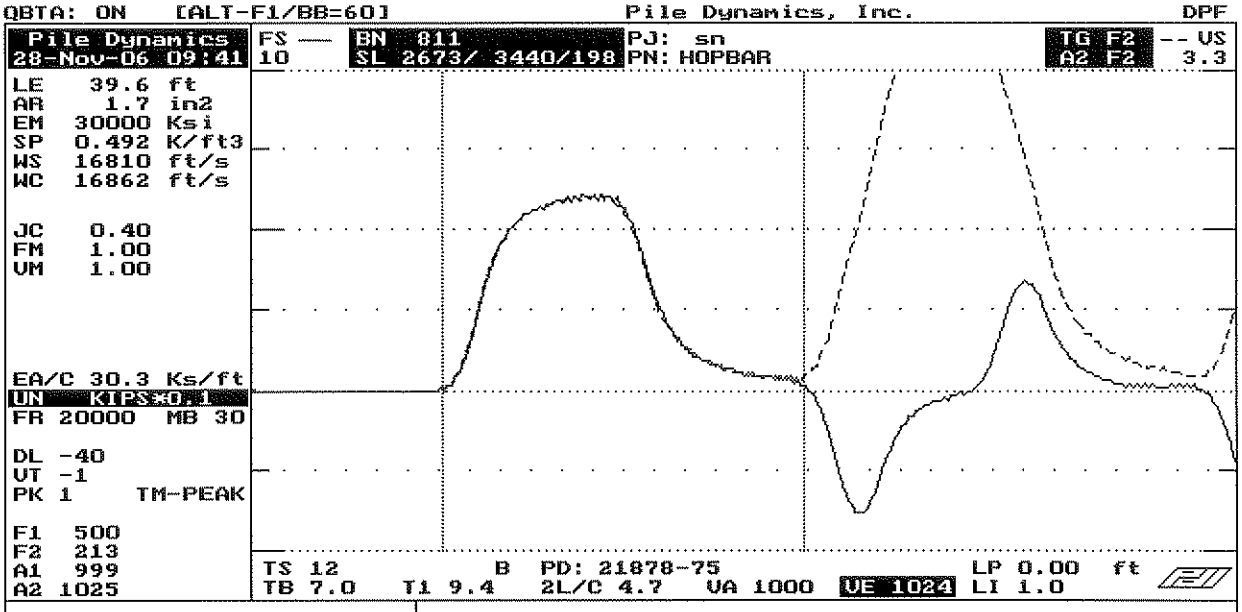

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 3.8 FMX= 61 AMX= 120
EMX= 0.2 MEX= 119 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 21878

CALIBRATION FACTOR: 1025 G/V

~~PAK (x5000)~~: _____ DATE: 28 Nov. 06

PDA OPERATOR: _____

<-AT:PIEZORESISTIVE OP: dave [ver:4.05] AT:PIEZOELECTRIC->