
QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

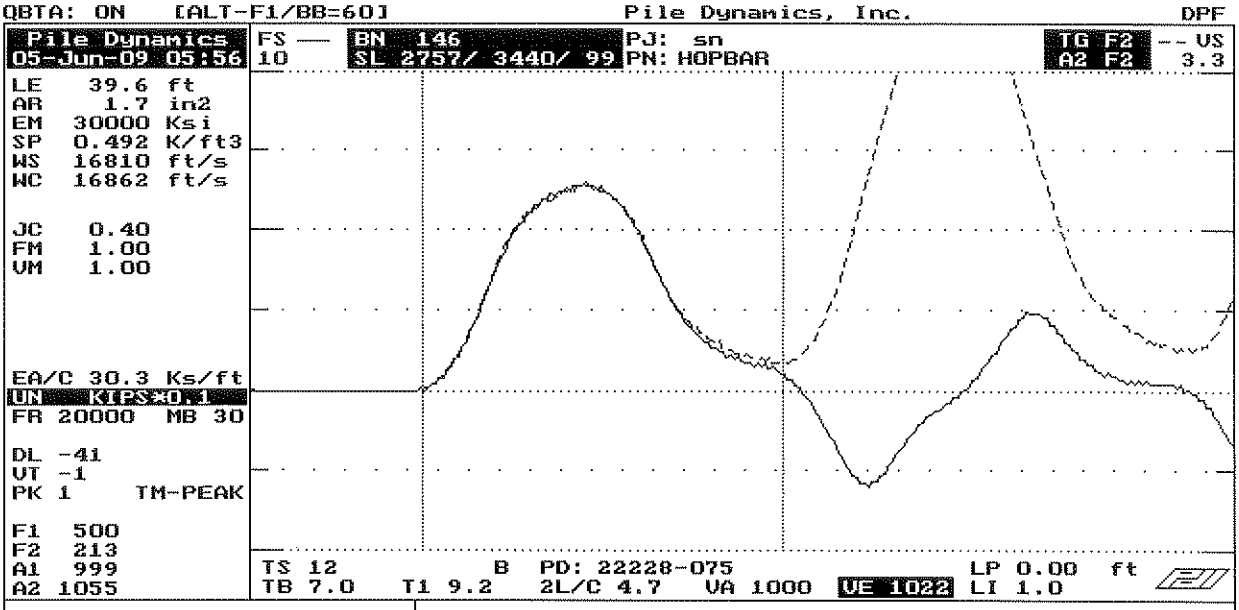

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.1 FMX= 65 AMX= 110
EMX= 0.3 MEX= 127 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22228

CALIBRATION FACTOR: 1055 G/v

~~PAK (*5000):~~ DATE: 5-JUN-09

PDA OPERATOR: Dale Dunell

<-AT:PIEZORESISTIVE OP: dale [ver:4.05] A:PIEZOELECTRIC->