
QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

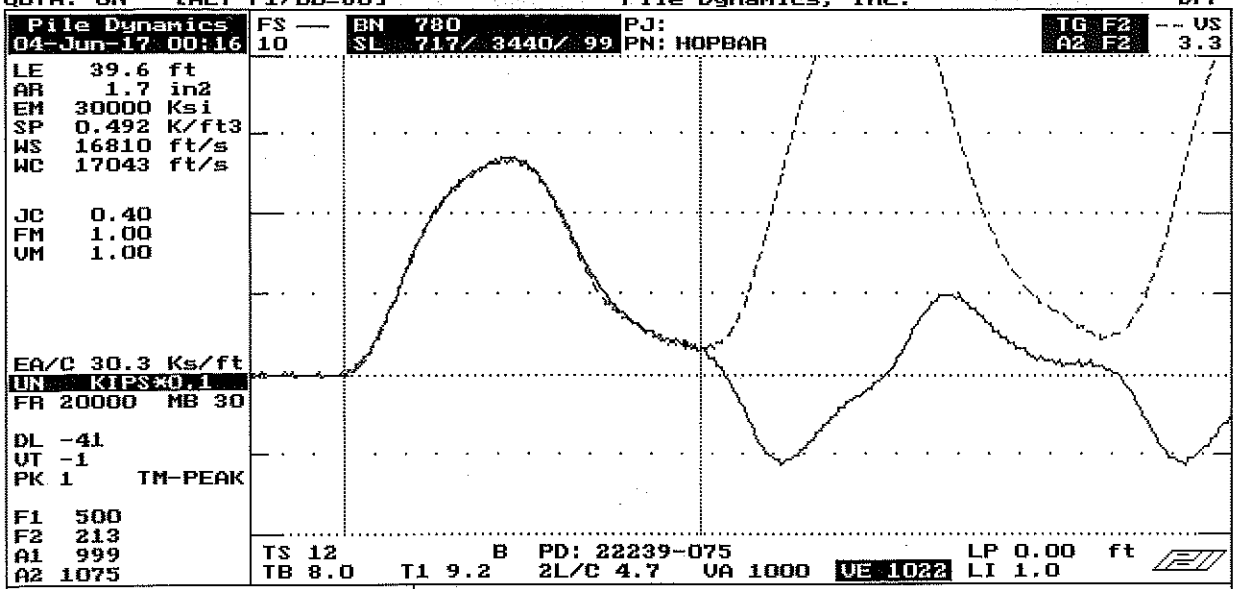

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.3 FMX= 68 AMX= 110
EMX= 0.3 MEX= 133 FVP= 0.99

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22239

CALIBRATION FACTOR: 1075 G/V

~~PAK (*5000)~~: _____ DATE: 7JUNE17

PDA OPERATOR: [signature]

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->