QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. PF

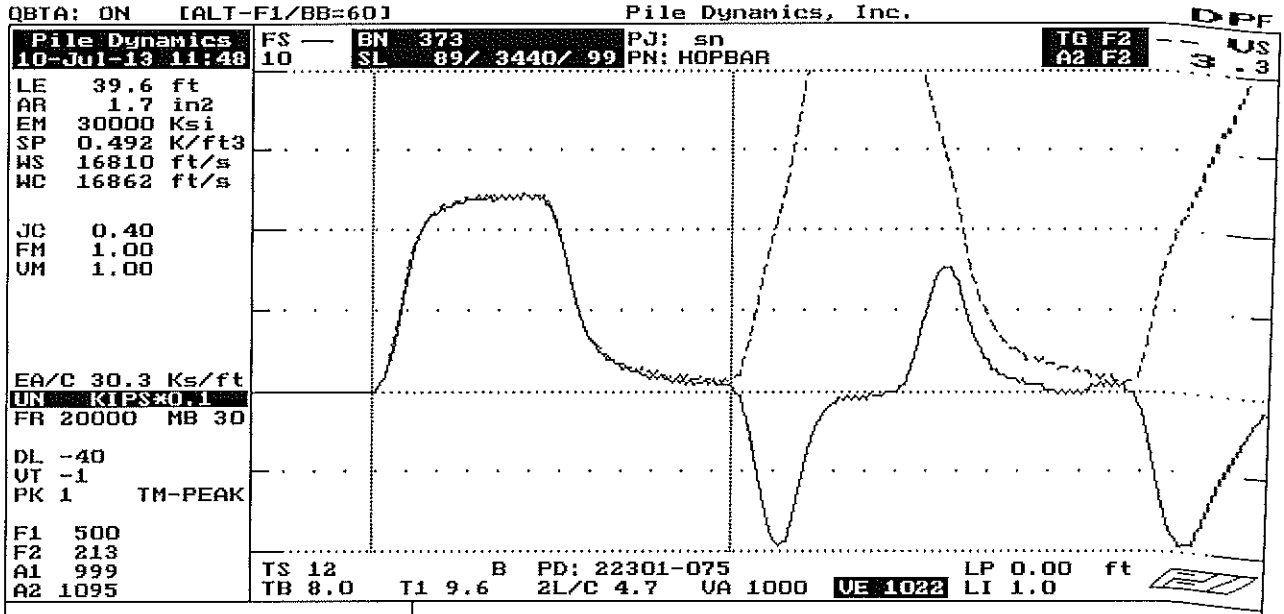

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.0 FMX= 62 AMX= 149
EMX= 0.2 MEX= 121 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22301

CALIBRATION FACTOR: 1095 G/V

~~PAK (*5000):~~ DATE: 10-JULY-13

PDA OPERATOR:

<-AT:PIEZORESISTIVE OP: alex [ver:4.05] AT:PIEZOELECTRIC ->