QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

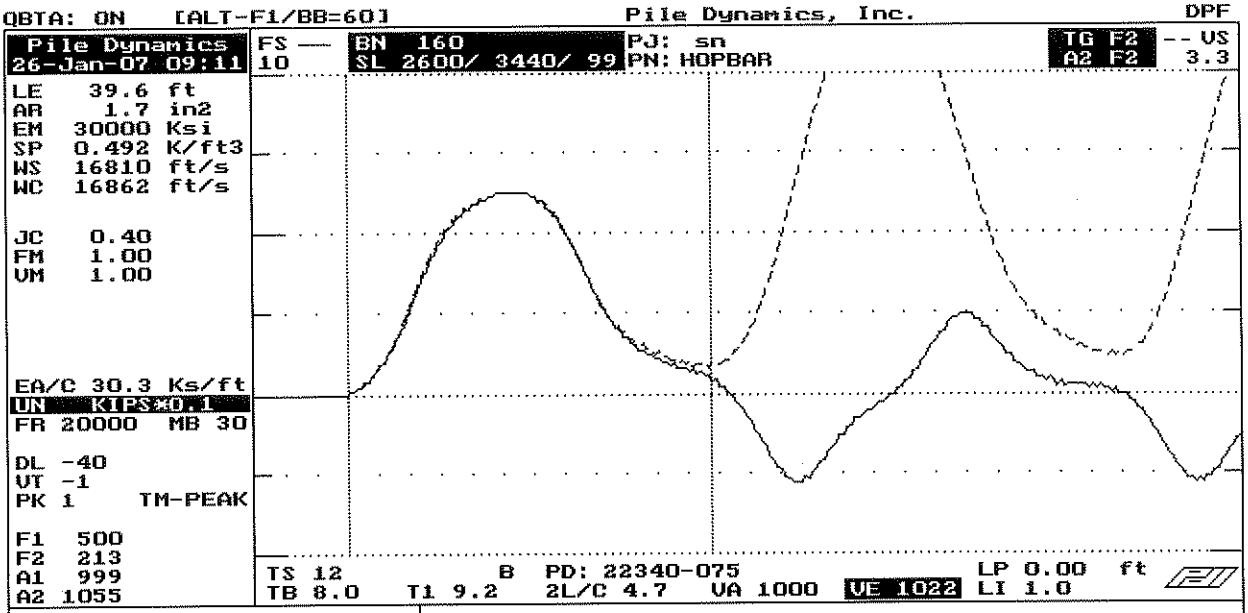

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.1 FMX= 64 AMX= 100
EMX= 0.3 MEX= 125 FVP= 0.98

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22340

CALIBRATION FACTOR: 1055 G/V

~~PAK (*5000)~~: _____ DATE: 26-Jan-07

PDA OPERATOR: [signature]

<-AT:PIEZORESISTIVE OP: alex [ver:4.05] AT:PIEZOELECTRIC->