QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

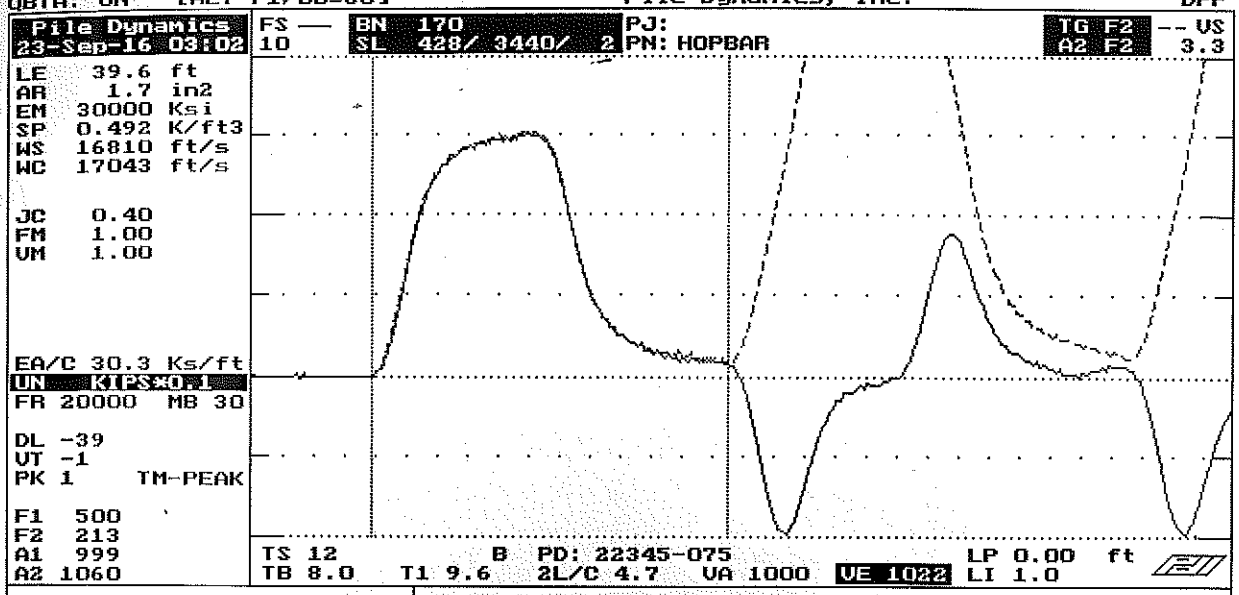

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.9 FMX= 76 AMX= 159
EMX= 0.4 MEX= 149 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22345

CALIBRATION FACTOR: 1060 g/v

~~PAK (*5000)~~: _____ DATE: 23SEPT 16

PDA OPERATOR: _____

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->