QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

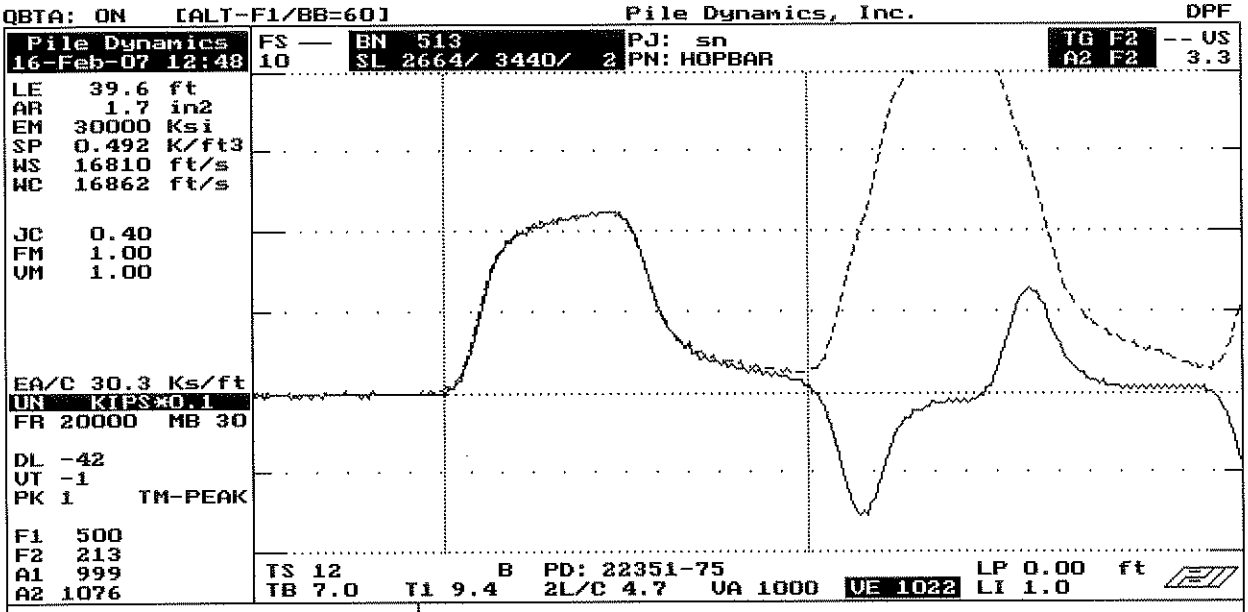

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 3.6 FMX= 57 AMX= 120
EMX= 0.2 MEX= 111 FVP= 1.02

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22351

CALIBRATION FACTOR: 1076 G/V

~~PAK (*5000)~~: _____ DATE: 16 Feb.07

PDA OPERATOR: _____

<-AT:PIEZORESISTIVE OP: DAVE [ver:4.05] AT:PIEZOELECTRIC->

QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

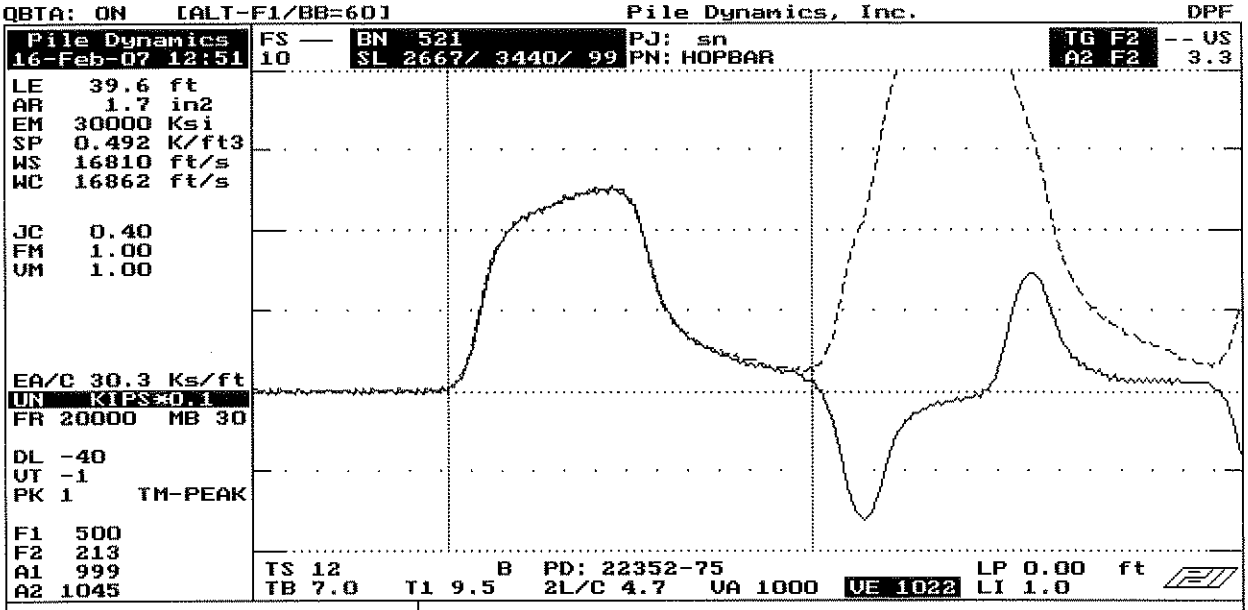

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.1 FMX= 63 AMX= 139
EMX= 0.3 MEX= 123 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22352

CALIBRATION FACTOR: 1045 G/V

~~PAK (*5000):~~ DATE: 16 Feb 07

PDA OPERATOR:

<-AT:PIEZORESISTIVE OP: DAVE [ver:4.05] AT:PIEZOELECTRIC->