QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

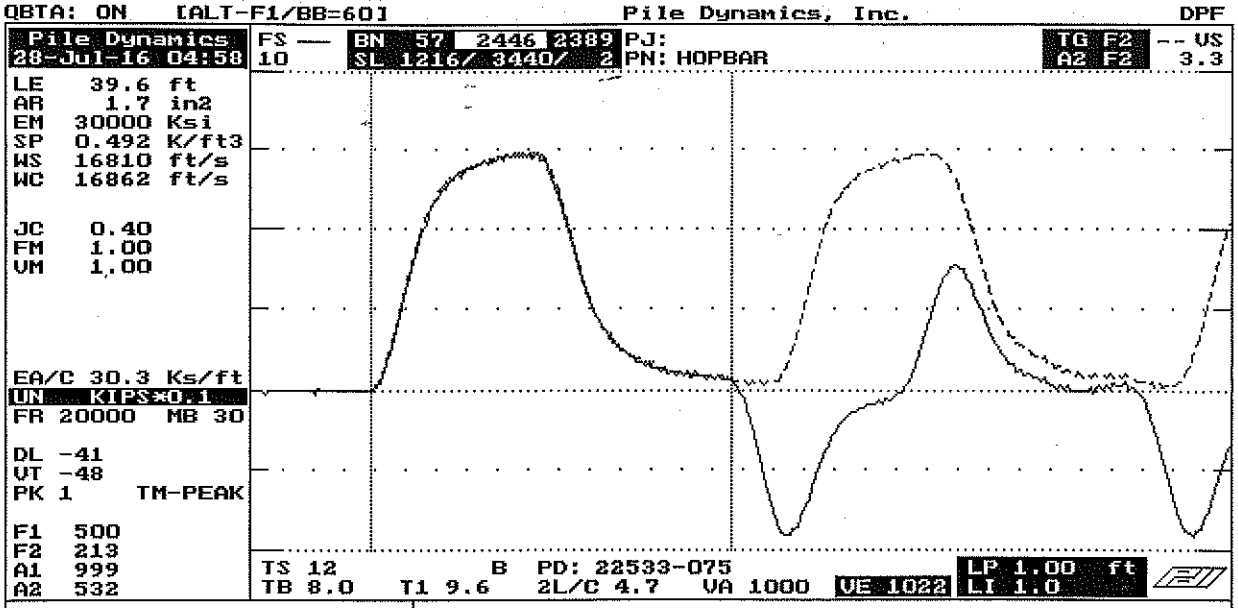

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 2.5 FMX= 74 AMX= 110
EMX= 0.5 MEX= 145 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22533

CALIBRATION FACTOR: 1064 g/v

~~PAK (*5000)~~: DATE: 28 July 16

PDA OPERATOR:

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->