
QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

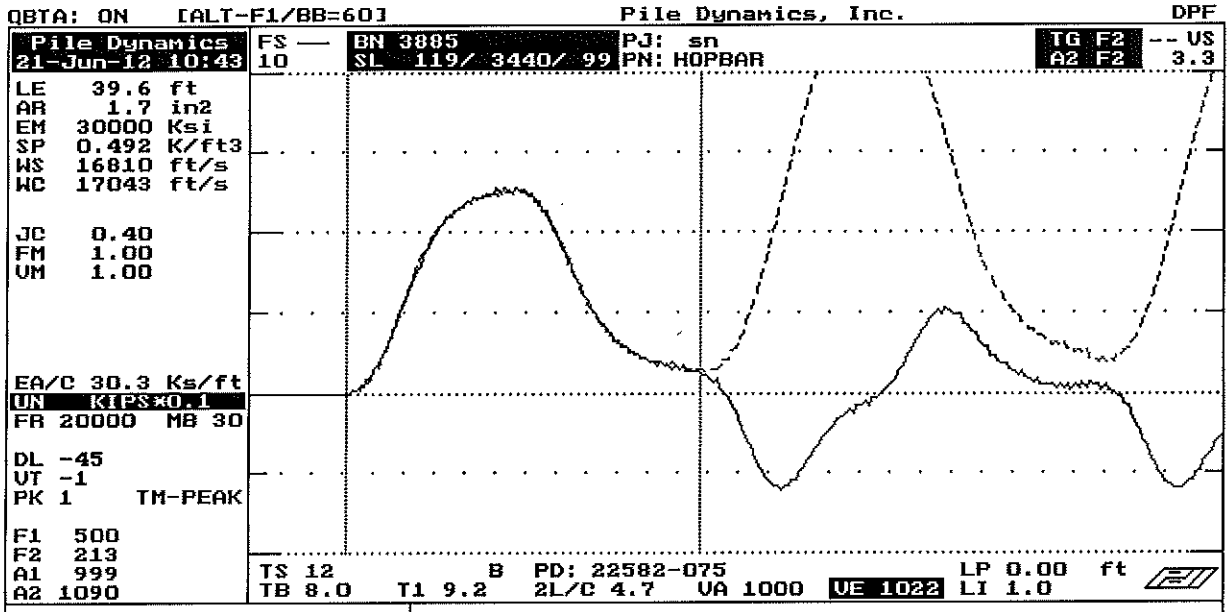

VMX= 4.1 FMX= 64 AMX= 110
EMX= 0.3 MEX= 125 FVP= 1.00

ACCEPT SQ-OFF FL-OFF PR-OFF

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22582 PE

CALIBRATION FACTOR: 1090 G/v

~~PAK (*5000):~~ DATE: 21-Jun-12

PDA OPERATOR:

<-AT:PIEZORESISTIVE OP: dale [ver:4.05] AT:PIEZOELECTRIC->