
QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

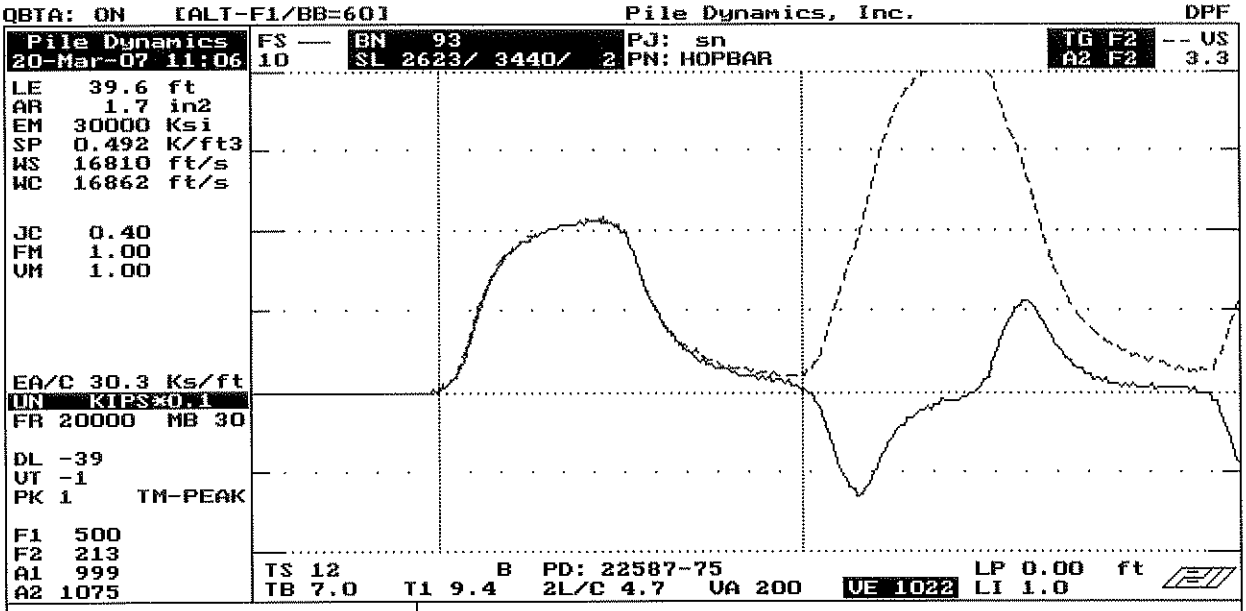

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 3.5 FMX= 54 AMX= 110
EMX= 0.2 MEX= 105 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 22587

CALIBRATION FACTOR: 1075 G/V

~~PAK (>5000):~~ _____ DATE: 20 Mar. 07

PDA OPERATOR: [signature]

<-AT:PIEZORESISTIVE OP: DAVE [ver:4.05] AT:PIEZOELECTRIC->