
QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

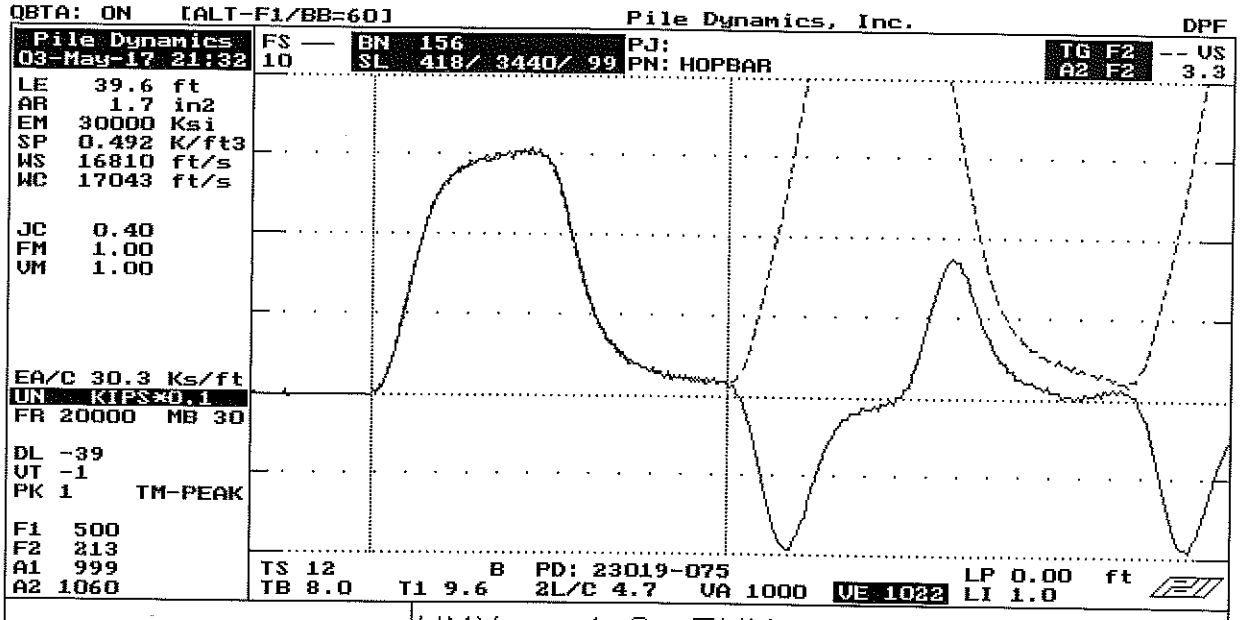


ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.9 FMX= 77 AMX= 149
EMX= 0.4 MEX= 150 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 23019

CALIBRATION FACTOR: 1060 G/V

~~PAK (*5000)~~: _____ DATE: 4MAY17

PDA OPERATOR: _____

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->