
QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

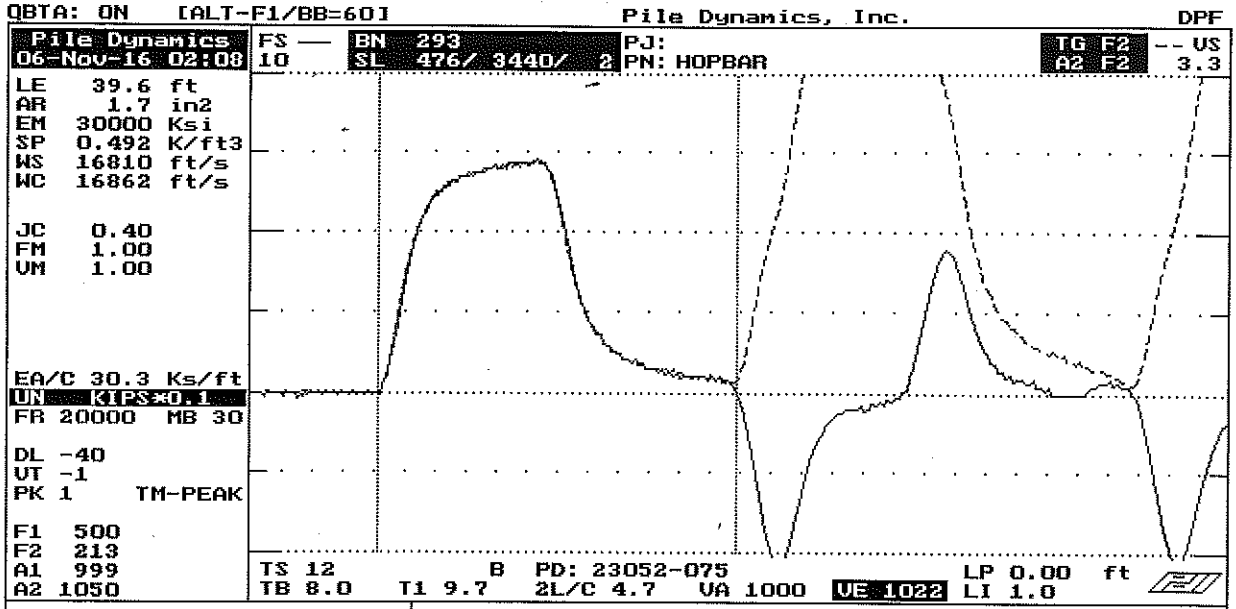

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.7 FMX= 73 AMX= 169
EMX= 0.3 MEX= 143 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 23052

CALIBRATION FACTOR: 1050 g/v

~~PAK (*5000)~~: _____ DATE: 7 NoV 16

PDA OPERATOR: [signature]

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->