QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

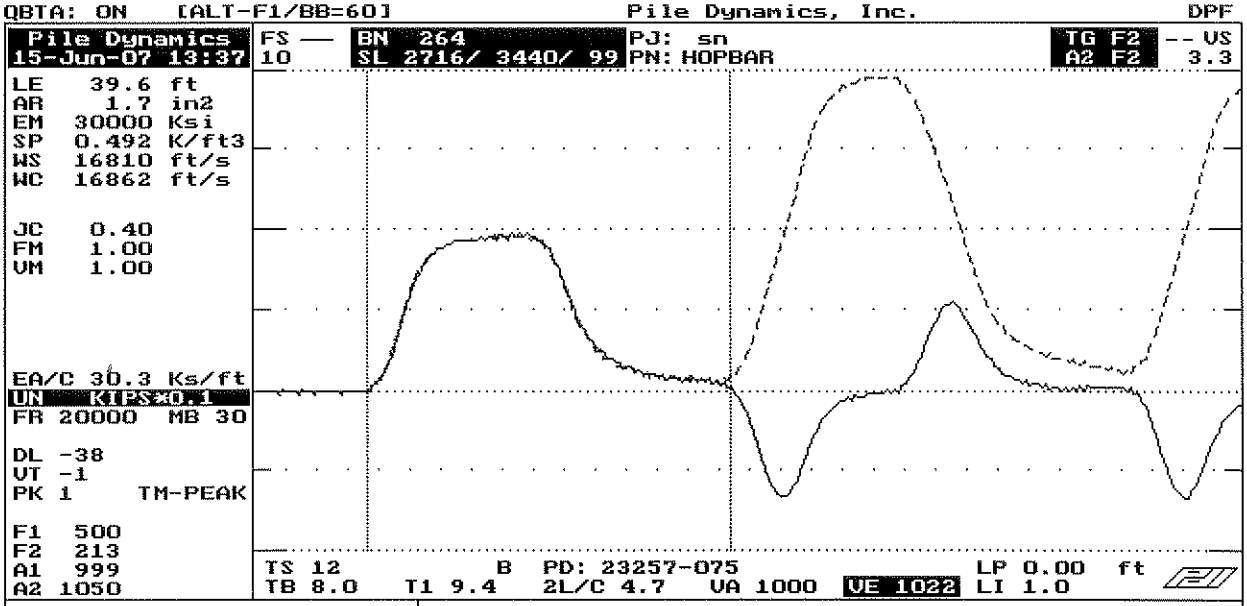

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 3.2 FMX= 49 AMX= 100
EMX= 0.2 MEX= 96 FVP= 1.00

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 23257

CALIBRATION FACTOR: 1050 G/V

~~PAK (×5000)~~: _____ DATE: 15-JUN-07

PDA OPERATOR: _____

<-AT:PIEZORESISTIVE OP: alex [ver:4.05] AT:PIEZOELECTRIC->