
QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. DPF

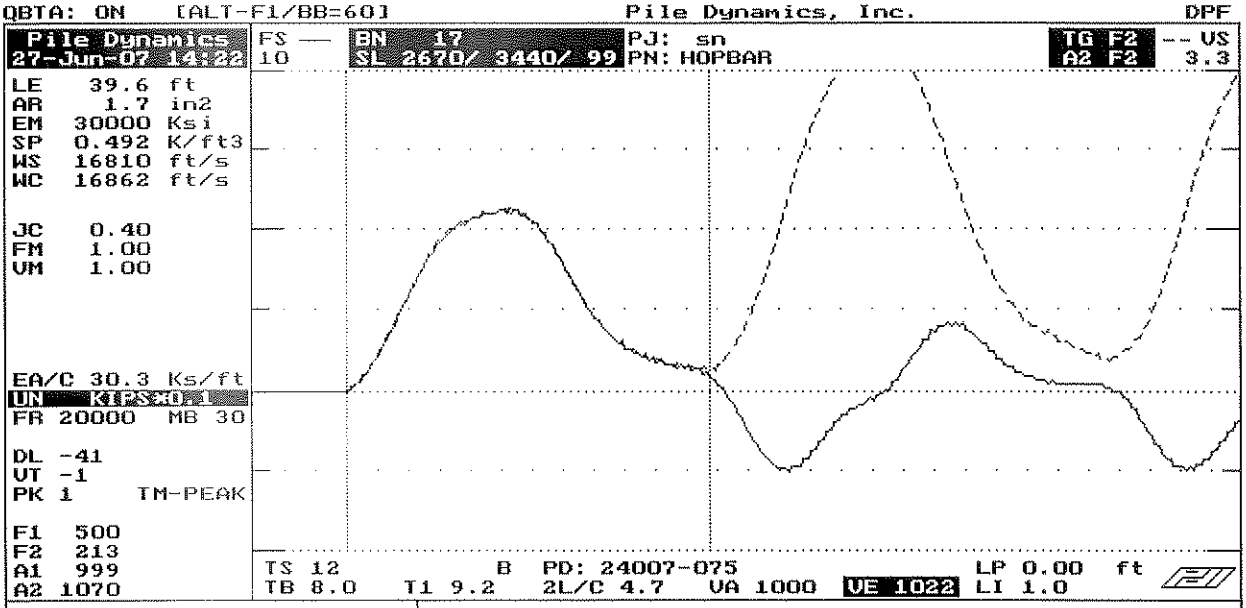

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 3.6 FMX= 57 AMX= 90
EMX= 0.2 MEX= 111 FVP= 0.98

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 24007

CALIBRATION FACTOR: 1070 G/V

~~BAK (×5000)~~: _____ DATE: 27-JUN-07

PDA OPERATOR: _____

<-AT:PIEZORESISTIVE OP: alex [ver:4.05] AT:PIEZOELECTRIC->