


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

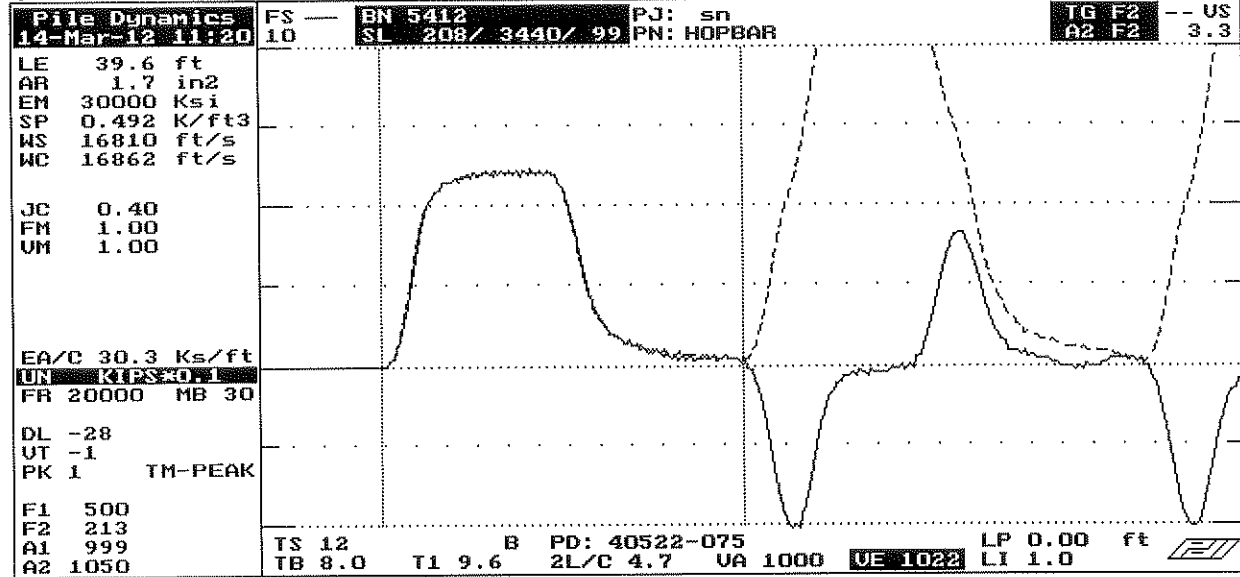

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

<-AT:PIEZORESISTIVE

UMX= 4.0 FMX= 62 AMX= 149
EMX= 0.2 MEX= 121 FUP= 1.00

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 40522
CALIBRATION FACTOR: 1050 G/v

PAK (K5000): DATE: 14-MAR-12

PDA OPERATOR: *[Signature]*

DP: ALEX [ver:4.05]

>AT:PIEZOELECTRIC<