



OBTA: ON IALT-F1/BB=601

Pile Dynamics, Inc.

DPF

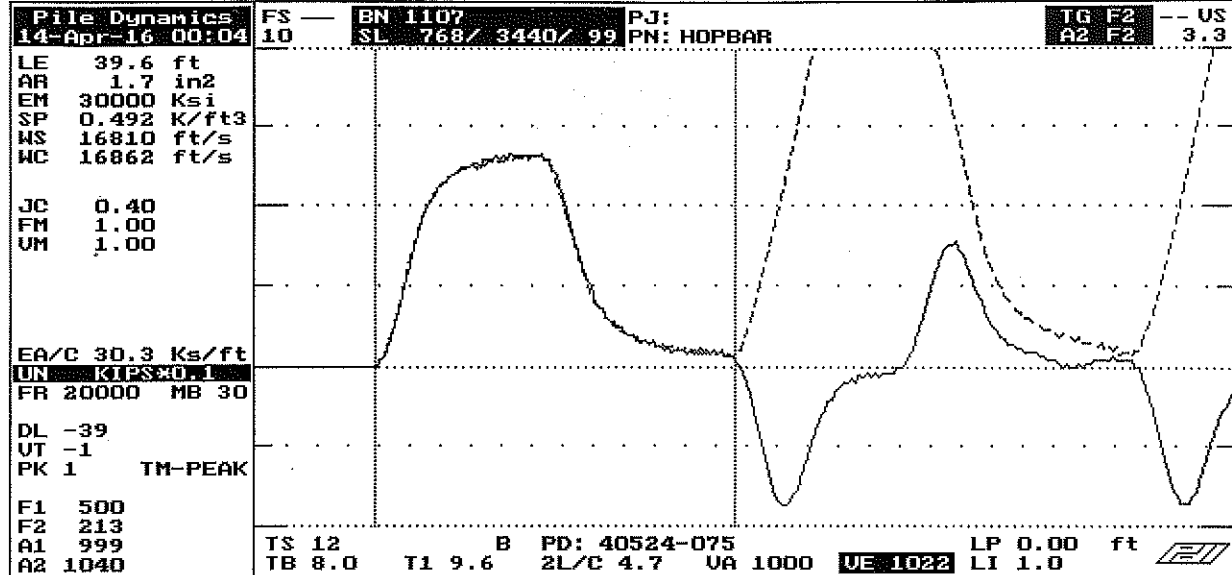

<input type="checkbox"/> ACCEPT <input type="checkbox"/> SQ-OFF <input type="checkbox"/> FL-OFF <input type="checkbox"/> PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 4.3 FMX= 66 AMX= 129 EMX= 0.3 MEX= 129 FUP= 1.00
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 40524 CALIBRATION FACTOR: 1040 % PAK (*5000): DATE: 19 APR 16 PDA OPERATOR: <i>[Signature]</i>
←-AT:PIEZORESISTIVE	OP: laine [ver:4.05]
	→-AT:PIEZOELECTRIC→