

File Dynamics
 22-Jun-16 00:25
 LE 39.6 ft
 AR 1.7 in2
 EM 30000 Ksi
 SP 0.492 K/ft3
 WS 16810 ft/s
 WC 17043 ft/s

FS — BN 1140
 10 SL 776/ 3440/ 99

PJ: PN: HOPBAR

TG F2 -- US
 A2 F2 3.3


JC 0.40
 FM 1.00
 VM 1.00

EA/C 30.3 Ks/ft
 UN KIPS=0.1
 FR 20000 MB 30

DL -42
 UT -1
 PK 1 TM-PEAK

F1 500
 F2 213
 A1 999
 A2 950

TS 12 B PD: 10384-b75 LP 0.00 ft
 TB 8.0 T1 9.6 2L/C 4.7 VA 1000 VE 1022 LI 1.0

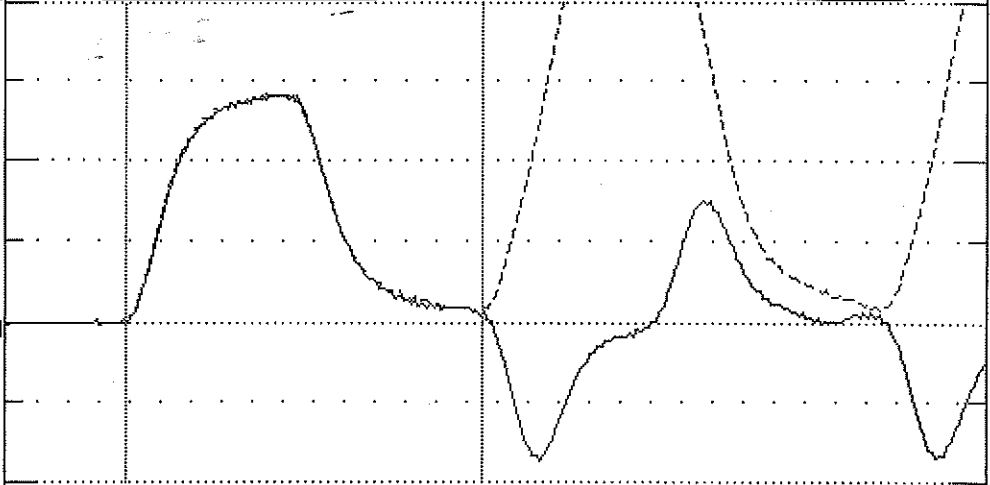

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

VMX= 4.6 FMX= 71 AMX= 149
 EMX= 0.3 MEX= 139 FUP= 0.98

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10384

CALIBRATION FACTOR: 950%

PAK (*5000): DATE: 22JUNE16

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->