


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

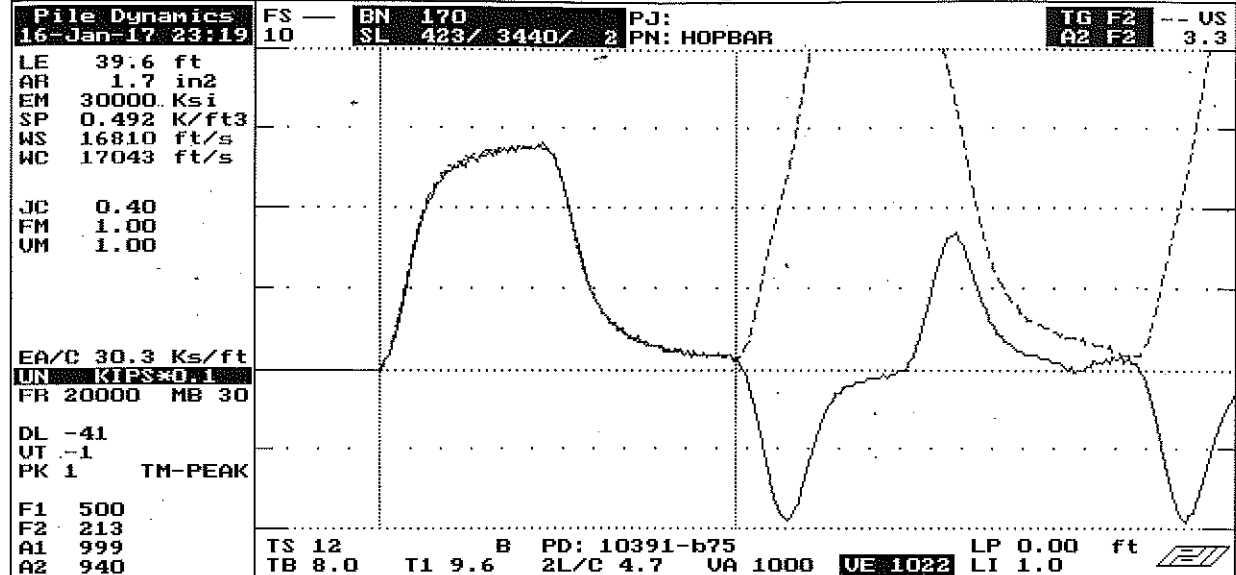

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.5 FMX= 70 AMX= 149	EMX= 0.3 MEX= 137 FUP= 0.99
	ACCELEROMETER CALIBRATION	N.I.S.T. Traceable
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: 10391	CALIBRATION FACTOR: 940 %/v
	PAK (*5000):	DATE:
	PDA OPERATOR: <i>Joe</i>	
<-AT:PIEZORESISTIVE	OP: laine lver:4.051	AT:PIEZOELECTRIC->