

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics 2018-03-02 10:58	FS — 10	BN 575 SL 647/ 3440/ 99	PJ: PN: HOPBAR	TG F2 -- US A2 F2 3.3
-----------------------------------	------------	----------------------------	-------------------	--------------------------


LE 17.0 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 7312 ft/s

JC 0.40
FM 1.00
VM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 90

DL -42
UT -1 IP 0.00
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 1160

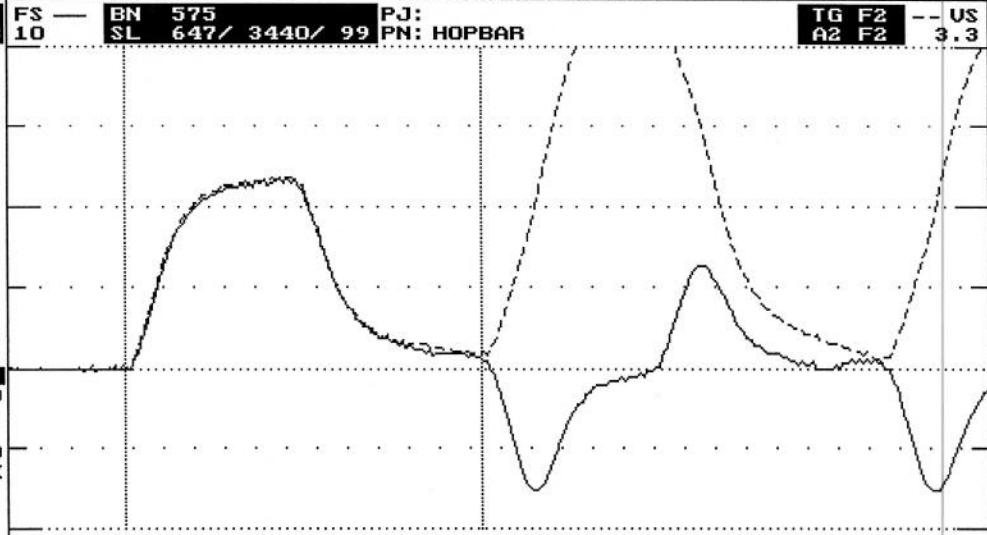

TS 12 B PD: 44806-075 LP 0.00 ft
TB 8.0 T1 9.5 2L/C 4.7 UA 1000 UE 1024 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 3.8 FMX= 59 AMX= 120
	EMX= 0.2 MEX= 115 FUP= 1.01

ACCEPT

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 44806

CALIBRATION FACTOR: 1160 %

PAK (*5000): DATE: 2 MAR 18

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: Iaine [ver:5.01]

AT:PIEZOELECTRIC->