



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

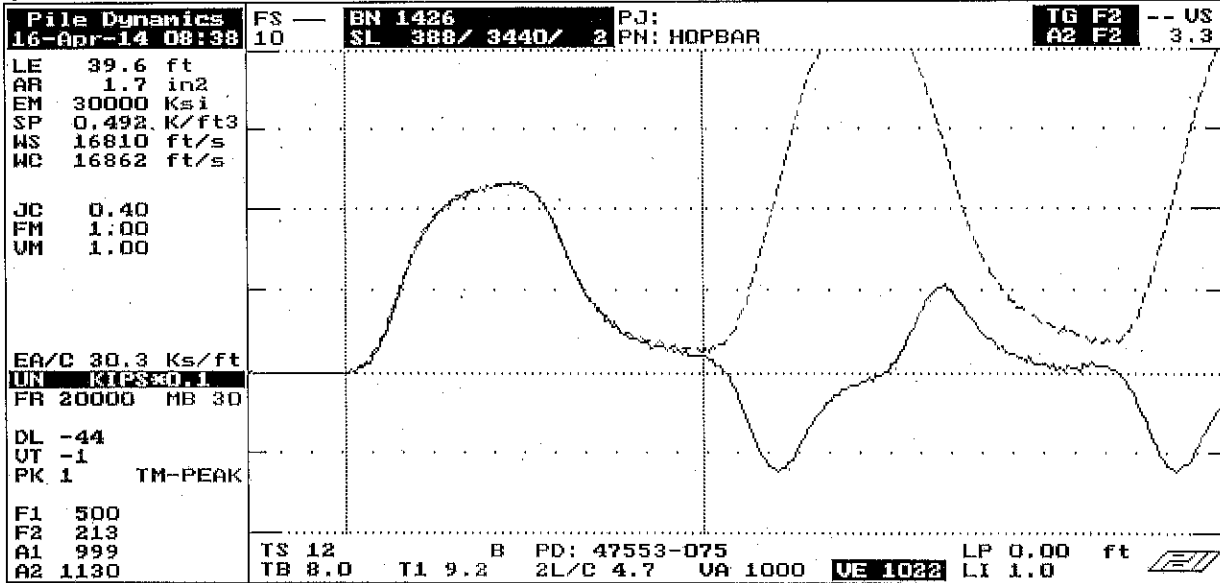

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 3.8 FMX= 59 AMX= 100 EMX= 0.2 MEX= 115 FVP= 1.00
 contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	ACCELEROMETER CALIBRATION N.I.S.T. Traceable
	SERIAL NUMBER: 47553
	CALIBRATION FACTOR: 1130 G/v
PAK (*5000):	DATE: 16-Apr-14
PDA OPERATOR: Erik S.	
<-AT:PIEZORESISTIVE	OP: erik Iver:4.053
	AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By E.S. on 4-16-14 CRC Value 3983