QBTA: ON [ALT-F1/BB=60] Pile Dynamics, Inc. *VS DPF

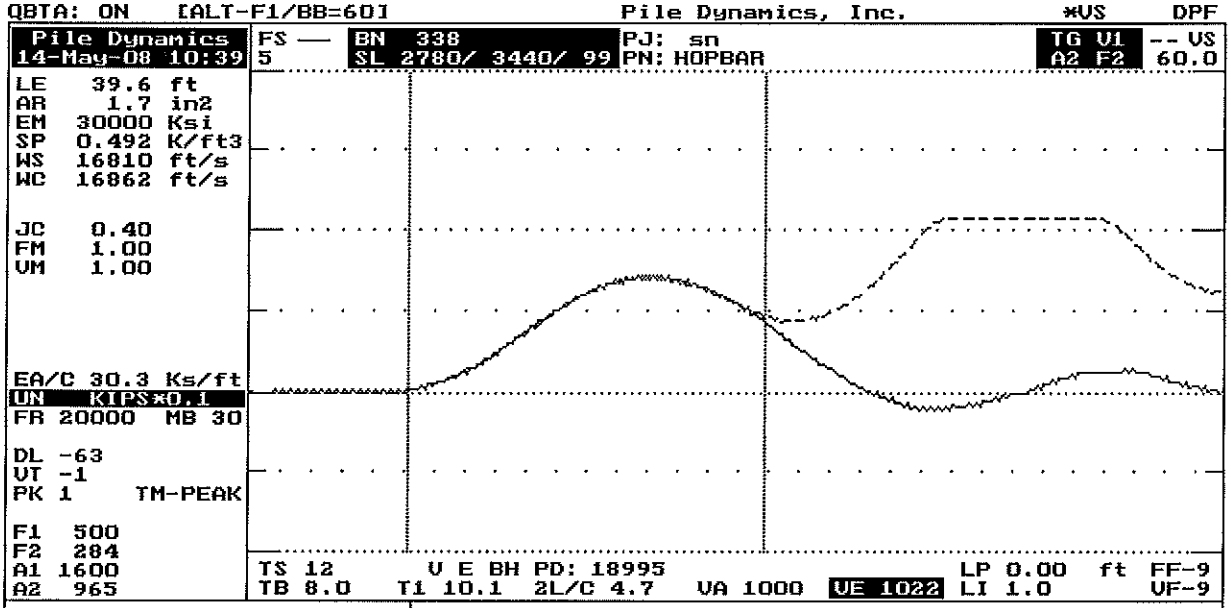

STANDBY SQ-OFF FL-OFF PR-OFF

VMX= 32.8 FMX= 18 AMX= 488
EMX= 1.5 MEX= 35 FVP= 0.02

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 18995

CALIBRATION FACTOR: 19.3 G/V

~~RAK-(x1000)~~: _____ DATE: 14-May-08

PDA OPERATOR: JTM RLC

<-AT:PIEZORESISTIVE OP: fred [ver:4.05] AT:PIEZOELECTRIC->