

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

TG F2 DPF

File Dynamics	FS —	BN 900	PJ:	A 4	-- US
1999-03-12 01:01	10	SL 911/ 3440/ 99	PN: HOPBAR	F 2	3.3


LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16815 ft/s
WC 17032 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 90

DL -46
UT -1 IP 0.00
PK 1 TM-PEAK

F1/2 500/ 213
F3/4 213/ 213
A1/2 999/ 999
A3/4 999/ 465

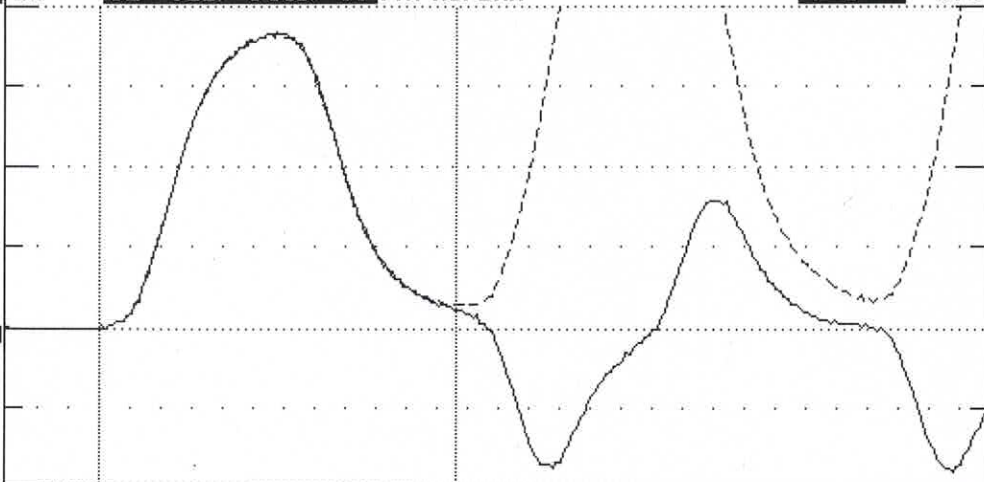

TS 12 E B PD: EMPR415 LP 0.00 ft
TB 8.0 T1 9.2 2L/C 4.7 UA 1000 UE 1024 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF

ACCEPT



VMX= 5.8 FMX= 92 AMX= 149
EMX= 0.5 MEX= 180 FVP= 1.00

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: EMPR415

CALIBRATION FACTOR: 0.093 m/s²

PAK (*5000): 465 DATE: 08-08-24

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: WILL [ver:5.01]

[AT:PIEZOELECTRIC->

Smart Sensor

Programmed By: WJ

CRC Value 520C

