

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

TG F2 DPF

File Dynamics	FS —	BN 930	PJ:	TG F2	DPF
1999-03-13 01:01	10	SL 939/ 3440/ 2	PN: HOPBAR	A 4 -- US	
				F 2 3.3	


LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16815 ft/s
WC 16500 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 90

DL -46
UT -1 IP 0.00
PK 1 TM-PEAK

F1/2 500/ 213
F3/4 213/ 213
A1/2 999/ 999
A3/4 999/ 450

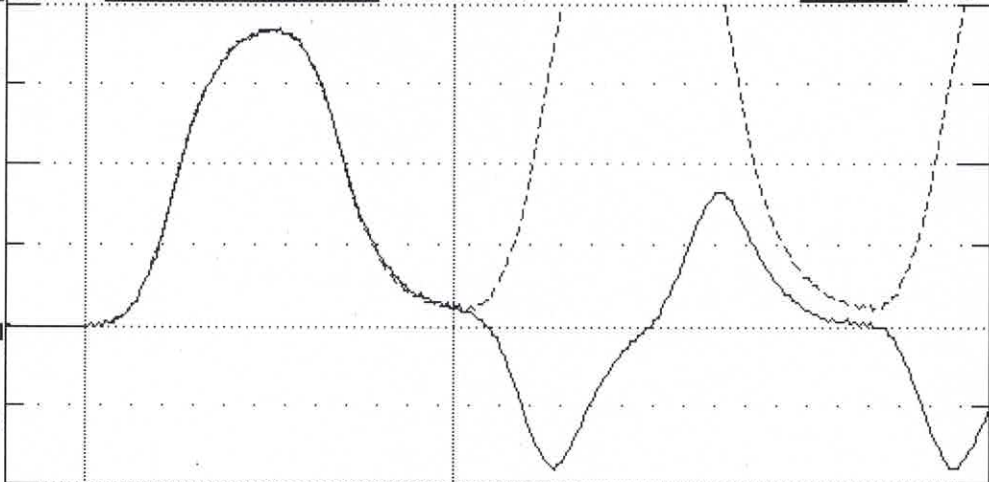

TS 12 E B PD: EMP418 LP 0.00 ft
TB 8.0 T1 9.0 2L/C 4.8 UA 1000 UE 1024 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF

UMX= 5.9	FMX= 92	AMX= 149
EMX= 0.5	MEX= 180	FVP= 1.00

ACCEPT	ACCELEROMETER CALIBRATION		N.I.S.T. Traceable
	SERIAL NUMBER: EMP418		
	CALIBRATION FACTOR: 0.09 mV/g		
	PAK (*5000): 450		
	DATE: 08-09-24		
PDA OPERATOR: WJL			

<-AT:PIEZORESISTIVE

OP: WILL [ver:5.01]

AT:PIEZOELECTRIC->

Smart Sensor

Programmed By: WJ

CRC Value DAF4

