

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

TG F2 DPF

Pile Dynamics 1999-03-16 00:52	FS — 10	BN 959 SL 961/ 3440/ 99	PJ: PN: HOPBAR	A 4 -- US F 2 3.3
-----------------------------------	------------	----------------------------	-------------------	----------------------


LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16815 ft/s
WC 16163 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 90

DL -53
UT -1 IP 0.00
PK 1 TM-PEAK

F1/2 500/ 213
F3/4 213/ 213
A1/2 999/ 999
A3/4 999/ 415

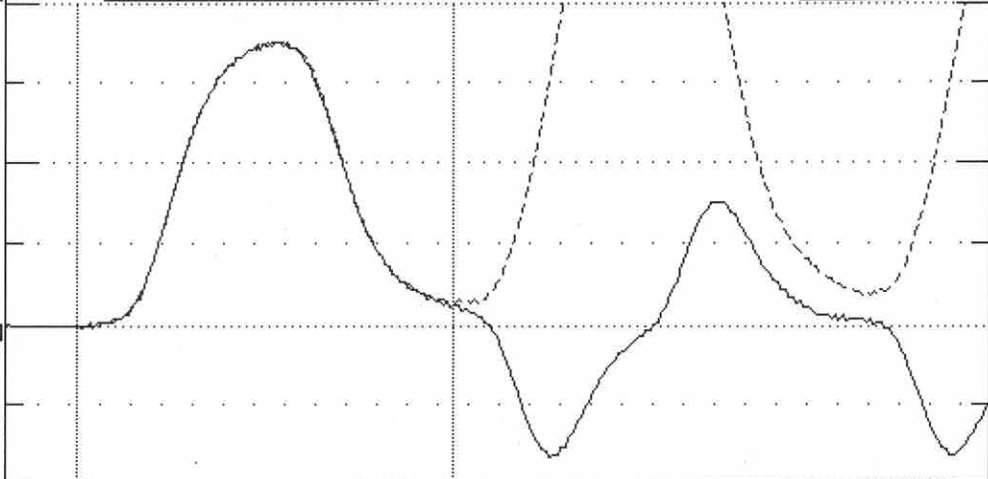

TS 12 E B PD: EMPR423 LP 0.00 ft
TB 8.0 T1 8.9 2L/C 4.9 UA 1000 UE 1024 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 5.7	FMX= 88	AMX= 139
EMX= 0.5	MEX= 172	FVP= 0.99

ACCEPT	ACCELEROMETER CALIBRATION N.I.S.T. Traceable	
	SERIAL NUMBER: EMPR423	
	CALIBRATION FACTOR: 0.083 m/g	
	PAK (*5000): 415	DATE: 08-12-2024
PDA OPERATOR: [Signature]		

<-AT:PIEZORESISTIVE

OP: WILL [ver:5.01]

AT:PIEZOELECTRIC->

Smart Sensor

Programmed By: WJ

CRC Value C302

