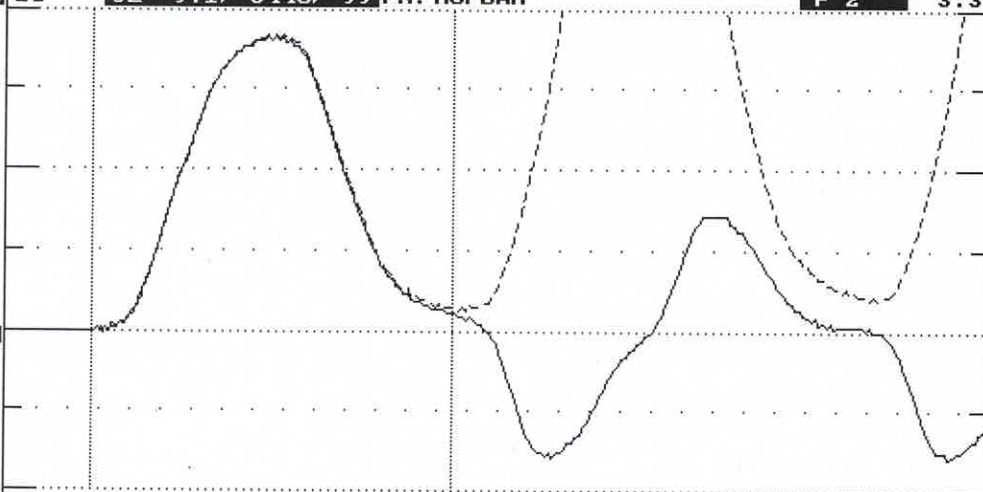



QBTA: ON [ALT-F1/BB=60]

File Dynamics, Inc.

TG F2 DPF

File Dynamics 1999-03-16 01:22		FS — 10	BN 981 SL 971/ 3440/ 99	PJ: PN: HOPBAR	A 4 -- US F 2 3.3
LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16815 ft/s WC 16851 ft/s					
JC 0.40 FM 1.00 UM 1.00					
EA/C 30.3 Ks/ft UN KIPS*0.1 FR 20000 MB 90					
DL -45 UT -1 IP 0.00 PK 1 TM-PEAK					
F1/2 500/ 213 F3/4 213/ 213 A1/2 999/ 999 A3/4 999/ 477	TS 12 TB 8.0	E B PD: EMP425 T1 9.1 2L/C 4.7	VA 1000	UE 1024	LP 0.00 ft LI 1.0
ACCEPT SQ-OFF FL-OFF PR-OFF		UMX= 5.9 FMX= 91 AMX= 159 EMX= 0.5 MEX= 178 FVP= 0.98			
ACCEPT 		ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: EMP425 CALIBRATION FACTOR: .0954 m/s ² PAK (*5000): 477 DATE: 08-12-2024 PDA OPERATOR: WILK JL			
<-AT:PIEZORESISTIVE		OP: WILL [ver:5.01]		AT:PIEZOELECTRIC->	

Smart Sensor

Programmed By: WJS

CRC Value A759

