

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

TG F2 DPF

Pile Dynamics 1999-03-16 01:37	FS — 10	BN 990 SL 975/ 3440/ 2	PJ: PN: HOPBAR	A 4 -- US F 2 3.3
-----------------------------------	------------	---------------------------	-------------------	----------------------

LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16815 ft/s
WC 16851 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft

UN KIPS*0.1

FR 20000 MB 90

DL -49

UT -1 IP 0.00


PK 1 TM-PEAK

F1/2 500/ 213

F3/4 213/ 213

A1/2 999/ 999

A3/4 999/ 400

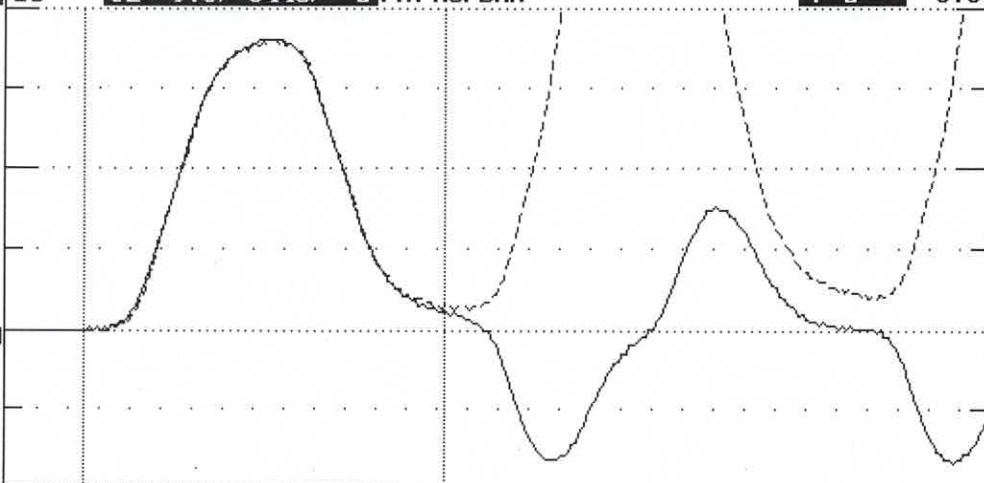

TS 12	E B	PD: EMP427	LP 0.00 ft
TB 8.0	T1 9.0	2L/C 4.7 VA 1000	UE 1024 LI 1.0

VMX= 5.8 FMX= 90 AMX= 169
EMX= 0.5 MEX= 176 FVP= 0.98

ACCEPT SQ-OFF FL-OFF PR-OFF

ACCEPT



ACCELEROMETER CALIBRATION

N.I.S.T. Traceable

SERIAL NUMBER:

EMP427

CALIBRATION FACTOR:

0.08 mV/g

PAK (*5000):

400

DATE: 08-12-2024

PDA OPERATOR:

Will

<-AT:PIEZORESISTIVE

OP: WILL Iver:5.011

AT:PIEZOELECTRIC->

Smart Sensor

Programmed By: WJ

CRC Value C8BE

