

Certificate of Calibration

Pile Dynamics, Inc.

Calibrated by Pile Dynamics, Inc.



Serial No: 52192 Temperature: 23.0 °C
Model: PE Humidity: 26%
Calibrated on: Channel 3 on 8G 5161 LE

PDA CALIBRATION FACTOR

1065.1 g's/volt

R²: 0.999968 [No chip]

Ref Acc 1: 78270! Cal on: 11Jan2024
971 g's/volt
Ref Acc 2: 78268! Cal on: 11Jan2024
986 g's/volt


Operator: William Johnson


Signed

Reference accelerometer calibrations are traceable to the United States National Institute of Standards and Technology (NIST).

Calibration valid 2 years

From: 03Mar2025

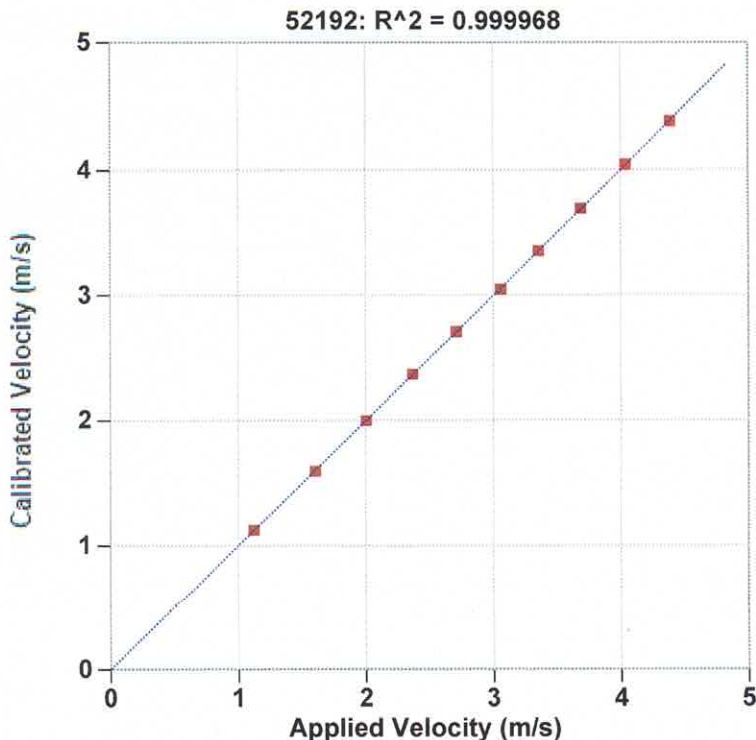

Reference Velocity	S/N 52192 Velocity
m/s	m/s
1.122	1.125
1.603	1.598
2.002	1.996
2.369	2.369
2.709	2.709
3.057	3.048
3.354	3.354
3.685	3.694
4.037	4.045
4.388	4.383
Maximum Acceleration: 968 g's	