
Pile Dynamics, Inc.

Transducer 352 W

Pile Dynamics, Inc.

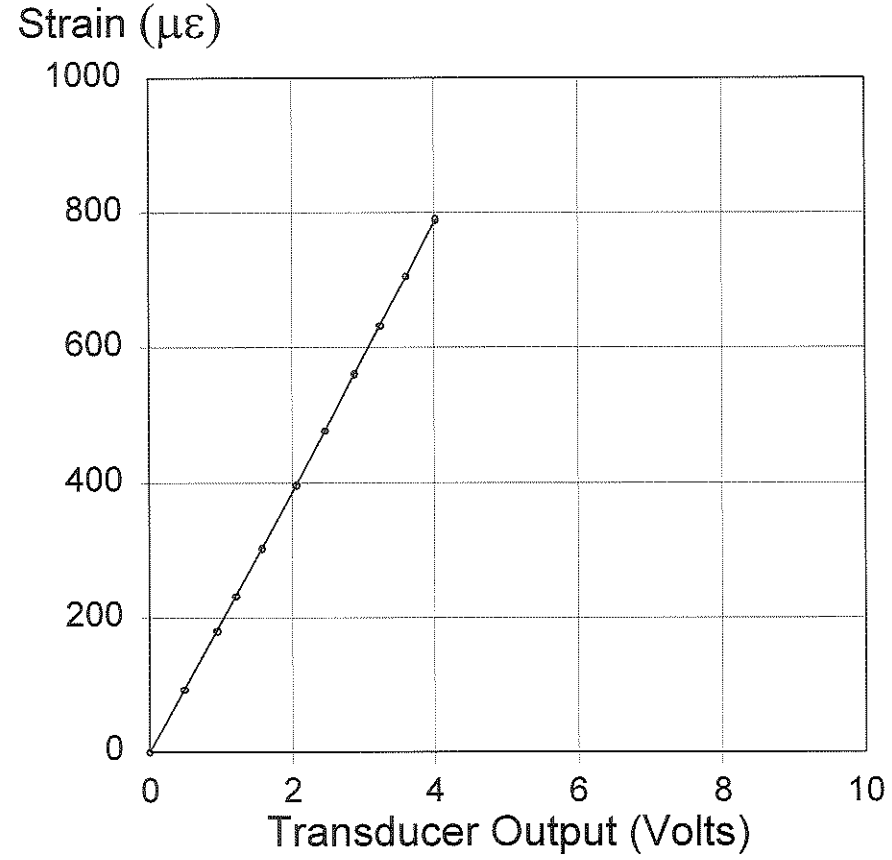

PDA Cal Factor 196.5με/V

Applied Strain (με)	Transducer Output (Volts)
0	0.00
92	0.47
180	0.93
232	1.19
304	1.57
397	2.04
477	2.45
561	2.87
631	3.22
705	3.60
791	4.02

Shunt (60.4 KΩ) 5.0 V

General Factor 682.4με/mV/V

Traceable to N.I.S.T.

Calibrated by: Fred Hussein

Calibrated on: 25-Mar-2004

Strain Transducer Calibrator System 2004 Version 1.2