Pile Dynamics, Inc.

Transducer 765W

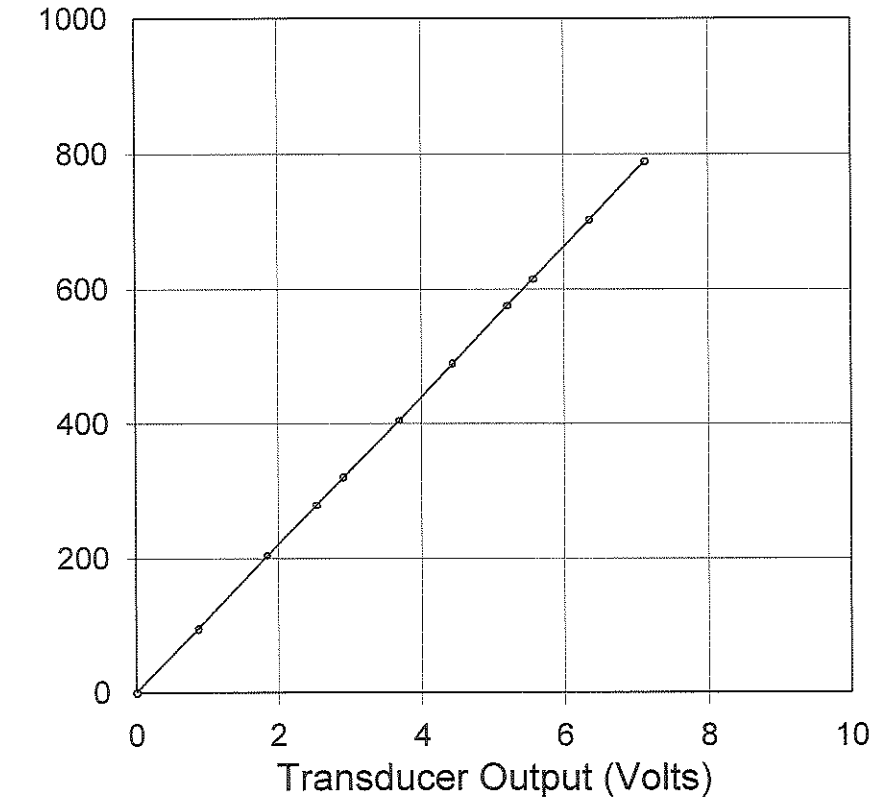

PDA Cal Factor 110.8με/V

Applied Strain (με)	Transducer Output (Volts)
0	0.00
96	0.87
203	1.84
278	2.53
319	2.90
404	3.68
490	4.44
576	5.20
615	5.56
703	6.35
789	7.12

Shunt (60.4 KΩ) 5.0 V

General Factor 384.8με/mV/V

Traceable to N.I.S.T.

Calibrated by: Fred Hamin

Calibrated on: 27-Jun-2005

Strain Transducer Calibrator System 2004 Version 1.2