Pile Dynamics, Inc.

Transducer 766W

Pile Dynamics, Inc.

PDA Cal Factor (5.0 V) 137.9με/V

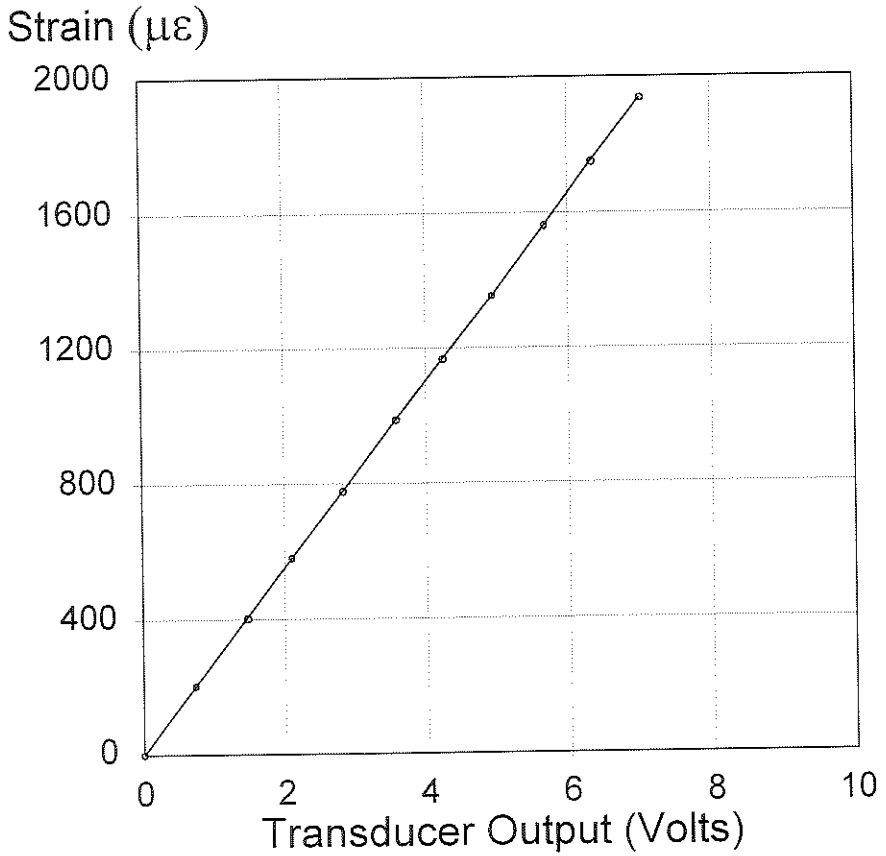

Applied Strain (με)	Transducer Output (Volts)
0	0.00
205	0.73
403	1.46
580	2.09
778	2.82
988	3.57
1167	4.23
1354	4.93
1564	5.67
1752	6.33
1939	7.02

Shunt (60.4 KΩ) 2.5 V

General Factor 478.7με/mV/V

Traceable to N.I.S.T.

Calibrated by: Fred Hain

Calibrated on: 01-Jun-2006

Strain Transducer Calibrator System 2004 Version 1.2