Pile Dynamics, Inc.

Transducer 767W

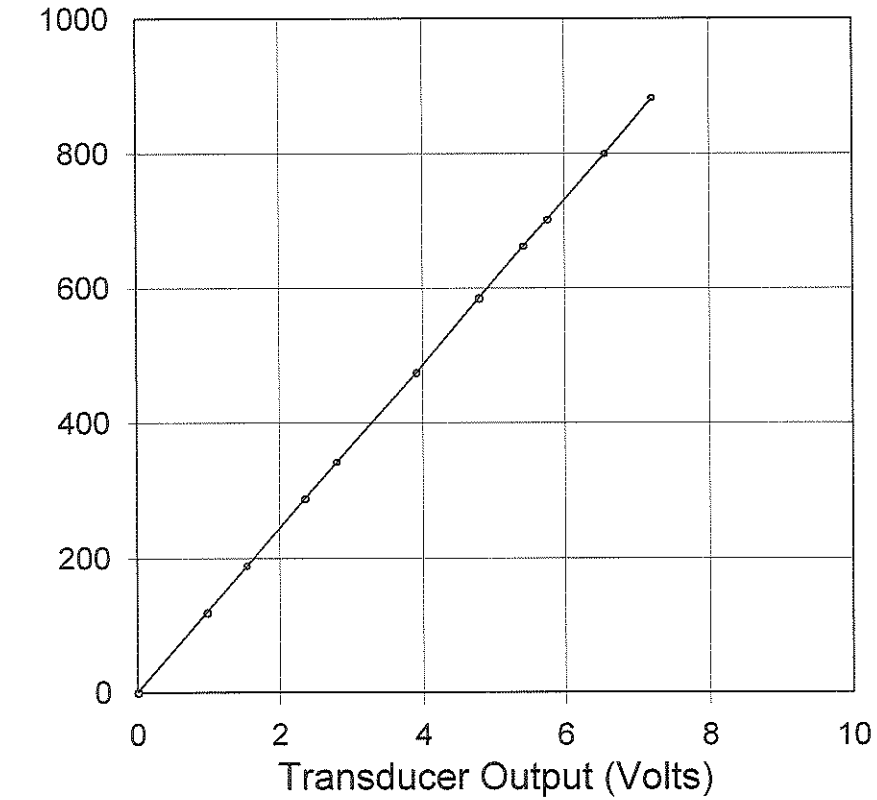

PDA Cal Factor 122.2με/V

Applied Strain (με)	Transducer Output (Volts)
0	0.00
119	0.97
189	1.55
287	2.35
342	2.79
475	3.91
584	4.79
662	5.41
702	5.75
800	6.55
882	7.21

Shunt (60.4 KΩ) 5.0 V

General Factor 424.3με/mV/V

Traceable to N.I.S.T.

Calibrated by: Fred Hamin

Calibrated on: 27-Jun-2005

Strain Transducer Calibrator System 2004 Version 1.2