Pile Dynamics, Inc.

Transducer 772W

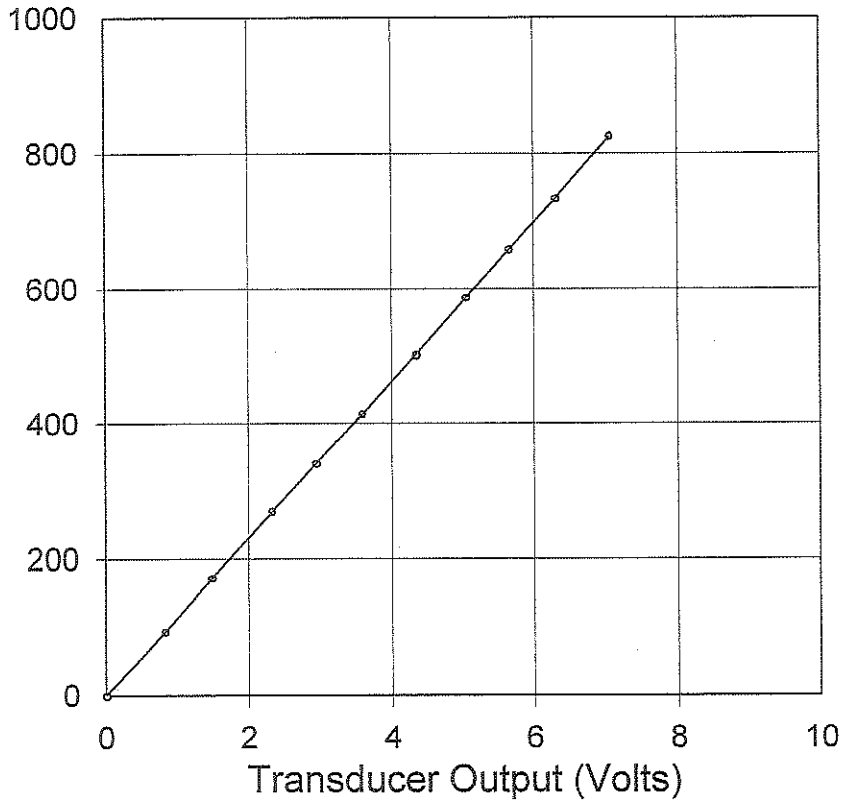

PDA Cal Factor 116.8με/V

Applied Strain (με)	Transducer Output (Volts)
0	0.00
95	0.83
171	1.48
268	2.32
339	2.93
414	3.58
503	4.34
586	5.04
658	5.65
733	6.30
825	7.06

Shunt (60.4 KΩ) 5.0 V

General Factor 405.5με/mV/V

Traceable to N.I.S.T.

Calibrated by: J. Scott

Calibrated on: 02-Aug-2005

Strain Transducer Calibrator System 2004 Version 1.2