




Pile Dynamics, Inc.

Transducer 458H

Strain ($\mu\epsilon$)

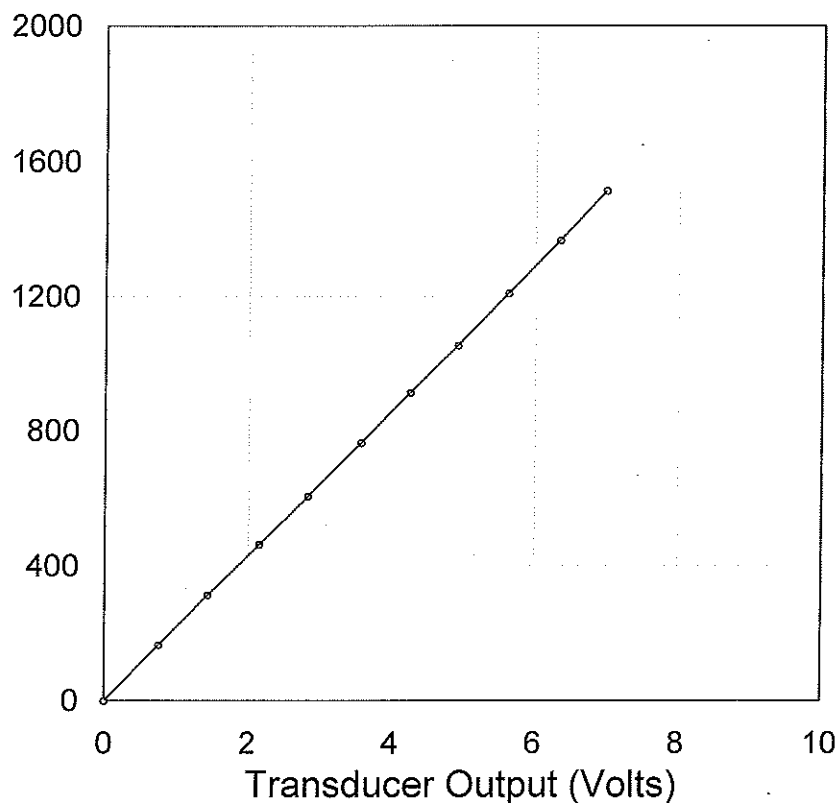

PDA Cal Factor (5.0 V) 107.7 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
165	0.75
313	1.43
463	2.15
606	2.83
762	3.57
912	4.25
1053	4.91
1208	5.62
1366	6.34
1514	6.99

Shunt (60.4 K Ω) 2.5 V
General Factor 373.9 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by: [Signature]
Calibrated on: 11-Oct-2012

Smart Sensor? ☒ Yes ☐ No Smart Chip Programmed by: E.S. Date: 10-11-12 CRC value 2DB8