




Pile Dynamics, Inc.

Transducer 581H

Strain ($\mu\epsilon$)

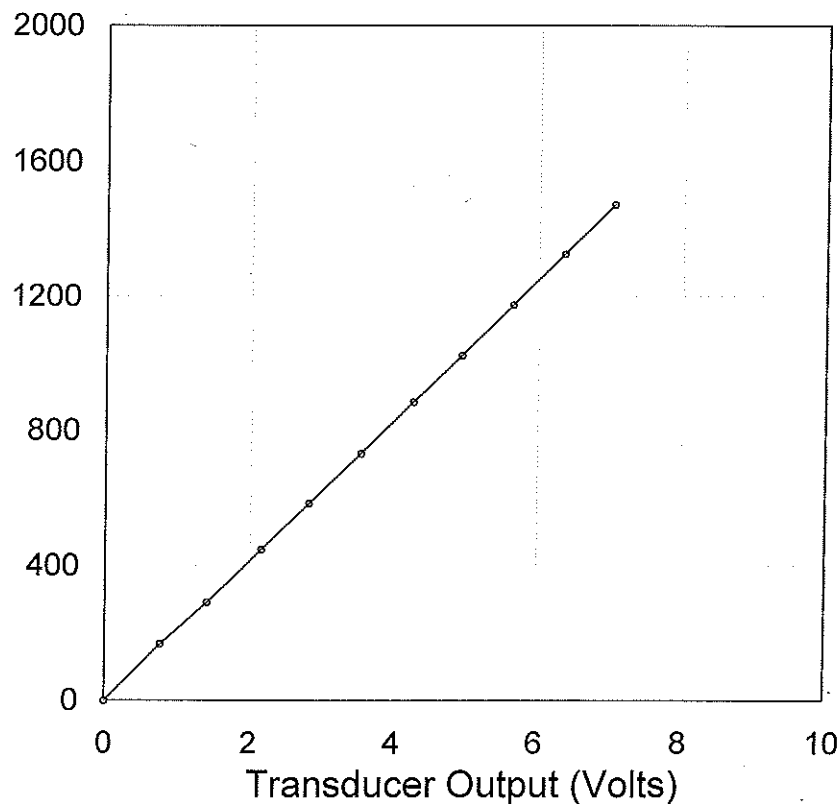

PDA Cal Factor (5.0 V)

104.2 $\mu\epsilon$ /V

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
168	0.77
292	1.41
447	2.15
583	2.82
731	3.54
884	4.26
1023	4.93
1174	5.64
1325	6.35
1472	7.04

Shunt (60.4 K Ω)

2.5 V

General Factor

361.6 $\mu\epsilon$ /mV/V

Traceable to N.I.S.T.

Strain Transducer Calibrator System 2011 Version 1.5

Calibrated by:

Calibrated on:

26-Dec-2013

Smart Sensor? ☒ Yes ☐ No Smart Chip

Programmed by: E.S. Date: 12-26-13 CRC value 375D