


Pile Dynamics, Inc. Transducer 800H

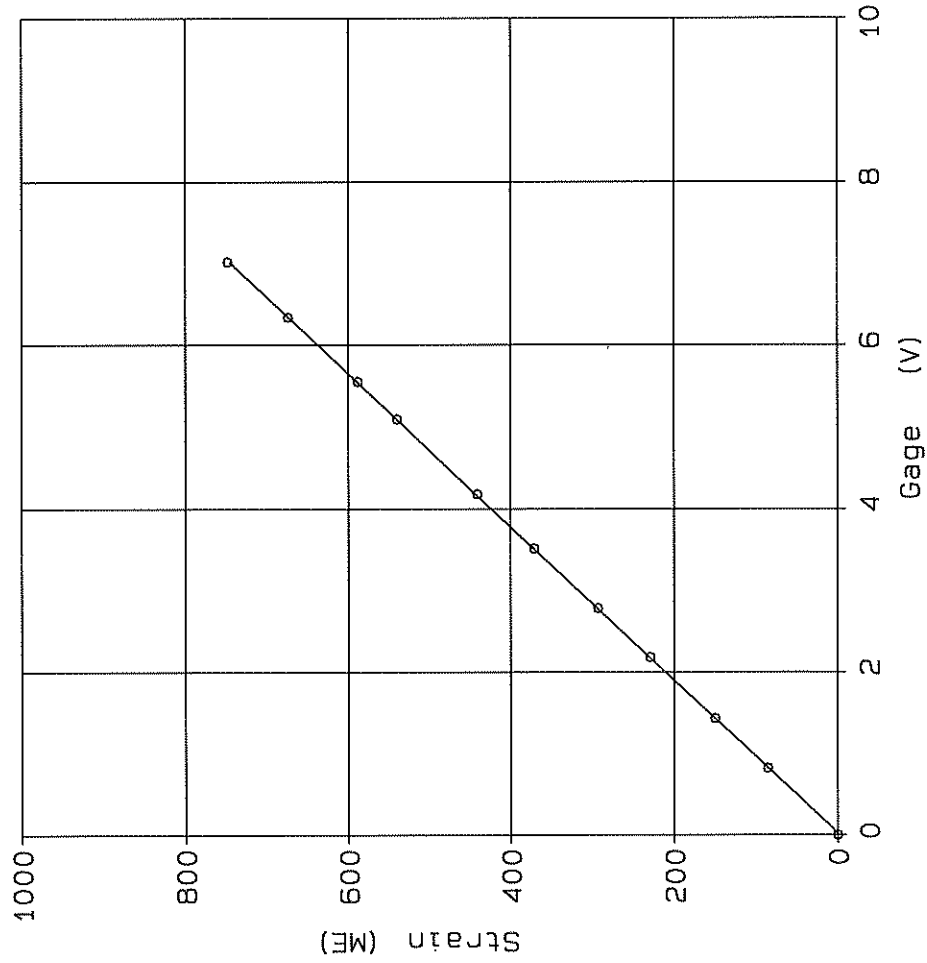

PDA Cal Factor = 106.6 ME/V
 Shunt (60.4KΩ) = 5.0 V
 General Factor = 370.0 ME/mV/V
 Traceable to N.I.S.T.

Strain ME	Gage V
0	.00
86	.83
151	1.44
229	2.19
294	2.79
371	3.52
442	4.18
540	5.10
589	5.55
674	6.34
749	7.03

Calibrated by: J. J. Bend

Calibrated on: 28-Jul-95