




Pile Dynamics, Inc.

Transducer 8095

Strain ($\mu\epsilon$)

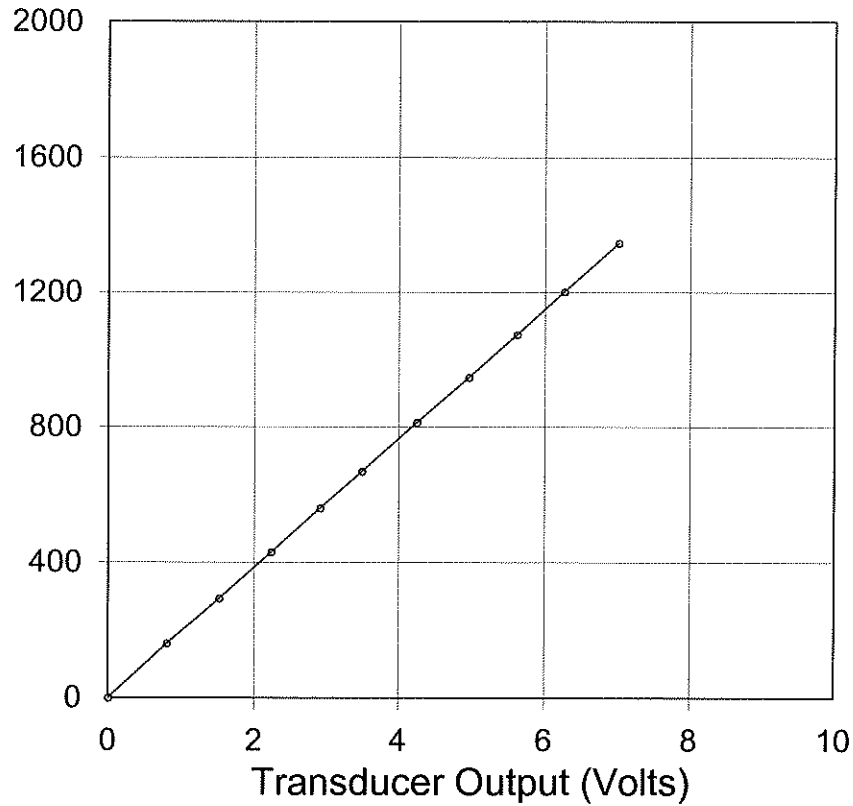

PDA Cal Factor (5.0 V)

95.6 $\mu\epsilon/V$

Applied Strain ($\mu\epsilon$)	Transducer Output (Volts)
0	0.00
160	0.79
293	1.51
430	2.23
561	2.91
668	3.49
812	4.24
947	4.95
1075	5.61
1203	6.26
1347	7.01

Shunt (60.4 K Ω)

2.5 V

General Factor

331.9 $\mu\epsilon/mV/V$

Traceable to N.I.S.T.

Calibrated by:

Calibrated on:

07-Aug-2008